

# IES-1041FX / 1042FX

## >> Industrial Slim Type 5-port/6-port Unmanaged Ethernet Switch

- 4 x 10/100Base-T(X) ports
- Support 100Base-FX ports (Multi-mode or Single-mode)
- Redundant DC power inputs
- Rigid IP-30 housing design



### > Features

- Dual redundant DC power inputs at terminal block
- Support 4 x 10/100Base-T(X) ports
- Support 100Base-FX ports (Multi-mode or Single-mode)
- Very wide operating temperature range from -40 to 70°C
- Rigid IP-30 housing design
- DIN-Rail and panel mounting enabled

### > Introduction

IES-1041FX/1042FX series are unmanaged Ethernet switches with 4 x 10/100Base-T(X) and 100Base-FX ports. IES-1041FX/1042FX series support redundant power input, configurable relay output alarm and rigid IP-30 housing. In addition, the wide operating temperature range from -40 to 70°C can satisfy most of operating environment.


### > Practical Operation

IES-1041FX/1042FX series can be used in connecting several Ethernet devices like Ethernet I/O, IP-Camera or other Ethernet switches. In addition, there are two different power inputs at terminal block to avoid interruption caused by power down. When the primary DC power input fails, the backup power input will take over immediately to guarantee a non-stop operation.



Connections of Ethernet devices

> Dimension

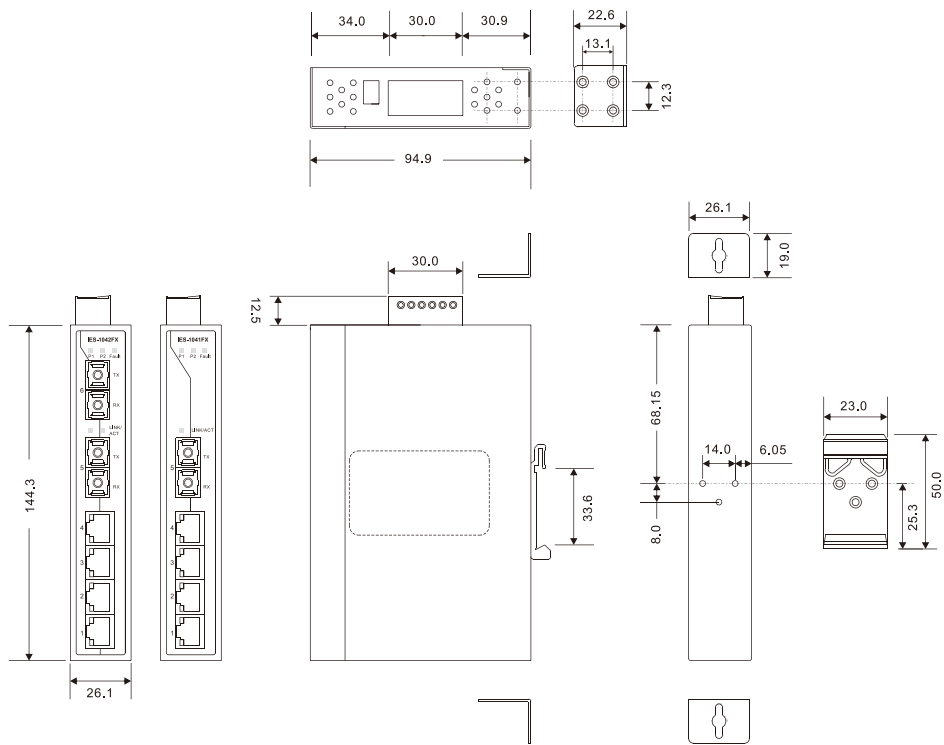

(Unit=mm)

> Specifications

ORing Switch Model	IES-1041FX-MM	IES-1041FX-SS	IES-1042FX-MM	IES-1042FX-SS
<b>Physical Ports</b>				
10/100Base-T(X) Ports in RJ45 Auto MDI/MDIX	4	4	4	4
100Base-FX Multimode ports (2KM, 1310nm, SC connector)	1		2	
100Base-FX Singlemode ports (30KM, 1310nm, SC connector)		1		2
<b>Technology</b>				
Ethernet Standards	IEEE 802.3 for 10Base-T, IEEE 802.3u for 100Base-T(X) and 100Base-FX, IEEE 802.3x for Flow control			
MAC Table	2048 MAC addresses			
Processing	Store-and-Forward			
<b>LED Indicators</b>				
Power Indicator	Green : Power LED x 2			
Fault Indicator	Amber : Indicate PWR1 or PWR2 failure			
10/100Base-T(X) RJ45 Port Indicator	Green for port Link/Act. Amber for Duplex/Collision			
<b>Fault contact</b>				
Relay	Relay output to carry capacity of 1A at 24VDC			
<b>Power</b>				
Redundant Input Power	Dual DC inputs. 12-48VDC on 6-pin terminal block			
Power Consumption (Typ.)	5 Watts		7 Watts	
Overload Current Protection	Present			
Reverse Polarity Protection	Present			

