


RFiD

OEM LEGIC Advant Reader

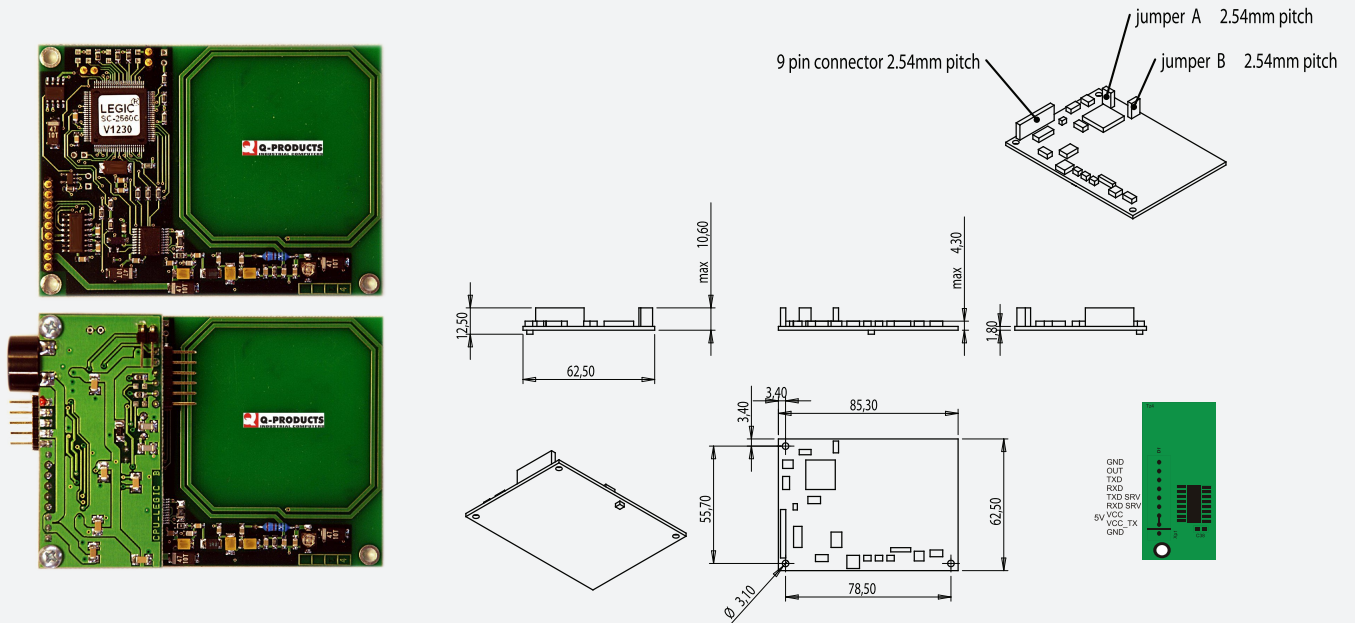

Frequency:	13.56 MHz
Processor:	Legic SC-2560C Security chip set
Antenna:	bulit-in
Operating Distance:	up to 25 cm, depending on tag
Interface:	Service Interface RS232 9600/19200 Bd Host Interface RS232 9600/19200/38400/57600/115200 Bd
Power requirements:	4.5 – 5.5V DC
Current Consumption:	215mA max.
Checksum:	8 bit LRC/16 bit CRC
RF Interface:	Compatible with ISO 15693, ISO 14443A, LEGIC RF Standard, INSIDE Sec.
Authentication:	DES, 3DES, AES 128/256 bit
EEPROM:	4KB
Dimensions:	85.3 x 62.5 mm
Operating temp.:	-20°C to +70°C
Storage temp.:	-40°C to +85°C

Authorised reseller:



Rybničná 36/E
83106 Bratislava
Slovakia, EU

tel.: +421 (0) 2 4464 6474
fax: +421 (0) 2 4464 6476
info@qproducts.sk