




P

provide wide range from 486 to Pentium level with minimum power requirement and wide operating temperature.

C/104 CPU Module

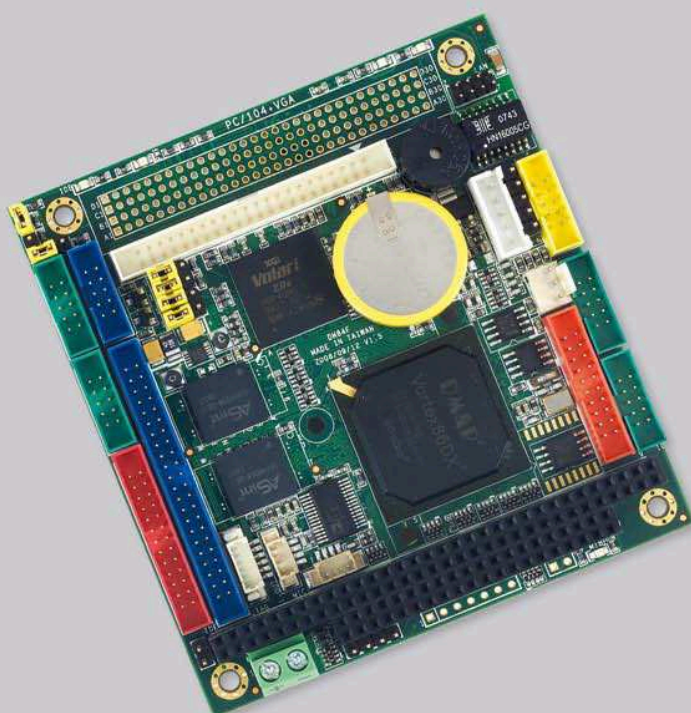

VDX-6353	Vortex86DX PC/104 CPU Module 256MB/4S/2USB/VGA/LCD/LVDS/LAN/GPIO/CF/PWMx16 ..	54
VDX-6354	Vortex86DX PC/104 CPU Module 256MB/4S/2USB/VGA/LCD/AUDIO/LAN/GPIO/PWMx16	55
VDX-6350E	Vortex86DX PC/104 CPU Module 256MB/4S/2USB/LAN/GPIO/PWMx16	56
VDX-6357	Vortex86DX PC/104 CPU Module 256MB/4S/2USB/VGA/LCD/3LAN/GPIO/PWMx16	57
VDX-6356	Vortex86DX PC/104 CPU Module 256MB/4S/2USB/3LAN/GPIO/PWMx16	58
VDX-6358	Vortex86DX PC/104 CPU Module 256MB/4S/2USB/VGA/LCD/2LAN/GPIO/PWMx16	59
VDX-6372	Vortex86SX PC/104 CPU Module 128MB/2S/2USB/VGA/LCD/GPIO/PWMx16	60
V SX-6153-V2	Vortex86SX PC/104 CPU Module 128MB/4S/2USB/VGA/LCD/LVDS/LAN/GPIO/CF	61
V SX-6154-V2	Vortex86SX PC/104 CPU Module 128MB/4S/2USB/VGA/LCD/LAN/GPIO	62
V SX-6150-V2	Vortex86SX PC/104 CPU Module 128MB/2S/2USB/GPIO	63
V SX-6150E-V2	Vortex86SX PC/104 CPU Module 128MB/4S/2USB/LAN/GPIO	64
V SX-6155-V2	Vortex86SX PC/104 CPU Module 128MB/4S/2USB/VGA/LCD/AUDIO/LAN/GPIO	65
V SX-6157-V2	Vortex86SX PC/104 CPU Module 128MB/4S/2USB/VGA/LCD/3LAN/GPIO	66
V SX-6156-V2	Vortex86SX PC/104 CPU Module 128MB/4S/2USB/3LAN/GPIO	67
V SX-6158-V2	Vortex86SX PC/104 CPU Module 128MB/4S/2USB/VGA/LCD/2LAN/GPIO	68

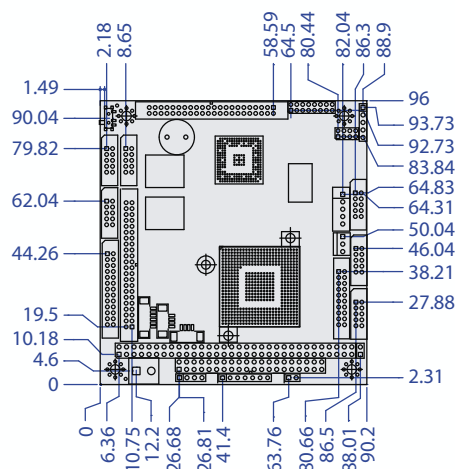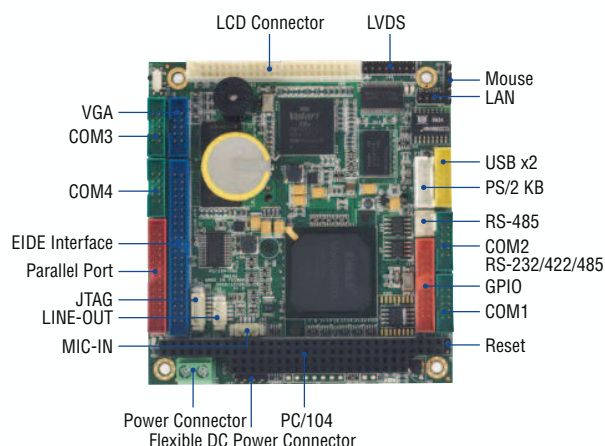

Unit: mm

Specifications

SoC	DM&P SoC CPU Vortex86DX- 800MHz Real Time Clock with Lithium Battery Backup
Cache	L1:16K I-Cache, 16K D-Cache L2 Cache 128KB
Bus	PC/104 standard compliant
BIOS	AMI BIOS
System Memory	256/512MB DDR2 Onboard
Watchdog Timer	Software programmable from 30.5μ sec.to 512 sec. x 2 sets (Watchdog 1 fully compatible with M6117D)
VGA	XGI Volari Z9s Chipset VGA and TFT/LVDS Flat Panel Interface Support Onboard 32MB VGA Memory, support resolution up to 1280 x 1024, 16M colors
LAN	Integrated 10/100Mbps Ethernet
Audio	CM119 USB audio controller (Optional)
Flash Disk Support	Onboard 4MB SPI Flash Disk MSTI EmbedDisk Module (16MB and above) Compact Flash Type I/II 44-pin IDE to Micro SD (Optional)
PWM	16~24 Channels
I/O Interface	Enhanced IDE port (UltraDMA-100/66/33) x1 RS-232 port x3 RS-232/422/485 port x1 USB port (Ver2.0) x2 Parallel port x1 16-bit GPIO port x1 10/100Mbps Ethernet port x1
Connectors	2.0mm 44-pin box header for IDE x1 2.0mm 44-pin box header for LCD x1 2.0mm 26-pin box header for Printer x1 2.0mm 20-pin box header for 16-bit GPIO x1 2.0mm 16-pin header for LVDS x1 2.0mm 10-pin box header for VGA x1 2.0mm 10-pin box header for USB x1 2.0mm 10-pin box header for RS-232 x4 2.0mm 8-pin header for Ethernet x1 2.54mm 5-pin box header for Keyboard x1 2.54mm 5-pin header for Mouse x1 2.54mm 4-pin header for -5V, -12V +12V, GND x1 2.54mm 3-pin header for RS-485 x1 2.54mm 2-pin header for Reset x1 2.54mm 7-pin header for Redundancy Signal x1 (Optional) 2.54mm 2-pin header for System-Fail-SW x1 (Optional) 1.25mm 6-pin wafer for JTAG x1 1.25mm 4-pin wafer for Line-out/MIC-in x2 (Optional)
Power Requirement	Single Voltage +5V @ 580mA

Weight	90g
Board Size	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)

Packing List

- VDX-6353 x1
- CD for User's Manual & Driver x1
- Cable
 - HDD 44P (2.0) x1
 - PRINT (2.0) x1
 - VGA (2.0) x1
 - RS-232 (2.0) x4
 - USB (2.0) x1
 - NET 4 x 2 (2.0) x1
 - GPIO (2.0) x1
 - PS2 KB White x1
 - PS2 Mouse Black x1
- Screw Kit x1



Ordering information

- **VDX-6353** Vortex86DX PC/104 CPU Module with 256MB DDR2
- **VDX-6353-512** Vortex86DX PC/104 CPU Module with 512MB DDR2
- **VDX-6353-AU** Vortex86DX PC/104 CPU Module with 256MB DDR2, Audio

Compact Flash Type I/II



VDX-6353

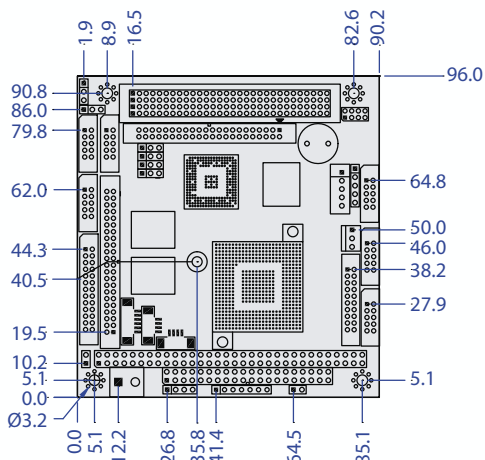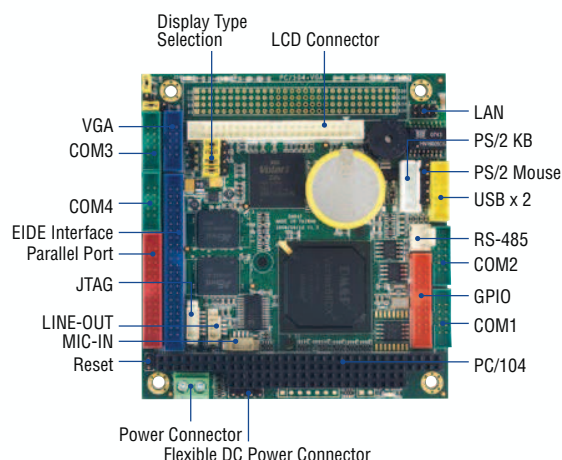

Unit: mm

Specifications

SoC	DM&P SoC CPU Vortex86DX- 800MHz Real Time Clock with Lithium Battery Backup
Cache	L1:16K I-Cache, 16K D-Cache L2 Cache 128KB
Bus	PC/104 standard compliant PCI-104 (Optional)
BIOS	AMI BIOS
System Memory	256/512MB DDR2 Onboard
Watchdog Timer	Software programmable from 30.5μ sec.to 512 sec. x 2 sets (Watchdog 1 fully compatible with M6117D)
VGA	XGI Volari Z9s Chipset VGA and TFT Flat Panel Interface Support Onboard 32MB VGA Memory, support resolution up to 1280 x 1024, 16M colors
LAN	Integrated 10/100Mbps Ethernet
Audio	CM119 USB audio controller
Flash Disk Support	Onboard 4MB SPI Flash Disk MSI EmbedDisk Module (16MB and above) 44-pin IDE to Micro SD (Optional)
PWM	16~24 Channels
I/O Interface	Enhanced IDE port (UltraDMA-100/66/33) x1 RS-232 port x3 RS-232/422/485 port x1 USB port (Ver2.0) x2 Parallel port x1 16-bit GPIO port x1 10/100Mbps Ethernet port x1
Connectors	2.0mm 44-pin box header for IDE x1 2.0mm 44-pin box header for LCD x1 2.0mm 10-pin box header for VGA x1 2.0mm 10-pin box header for USB x1 2.0mm 26-pin box header for Printer x1 2.0mm 20-pin box header for 16-bit GPIO x1 2.0mm 10-pin box header for RS-232 x4 2.0mm 8-pin header for Ethernet x1 2.54mm 5-pin box header for Keyboard x1 2.54mm 5-pin header for Mouse x1 2.54mm 4-pin header for -5V, -12V +12V, GND x1 2.54mm 3-pin header for RS-485 x1 2.54mm 2-pin header for Reset x1 2.54mm 7-pin header for Redundancy Signal x1 (Optional) 2.54mm 2-pin header for System-Fail-SW x1 (Optional) 1.25mm 6-pin wafer for JTAG x1 1.25mm 4-pin wafer for Line-out/MIC-in x2
Power Requirement	Single Voltage +5V @ 740mA
Weight	90g



Board Size	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)

Packing List

- VDX-6354 x1
- CD for User's Manual & Driver x1
- Cable
 - HDD 44P (2.0) x1
 - PRINT (2.0) x1
 - VGA (2.0) x1
 - RS-232 (2.0) x4
 - USB (2.0) x1
 - NET 4 x 2 (2.0) x1
 - GPIO (2.0) x1
 - Audio Line x2
 - PS2 KB White x1
 - PS2 Mouse Black x1
- Screw Kit x1

Ordering information

- **VDX-6354** Vortex86DX PC/104 CPU Module with 256MB DDR2
- **VDX-6354-PLUS** Vortex86DX PC/104+ CPU Module with 256MB DDR2
- **VDX-6354-512** Vortex86DX PC/104 CPU Module with 512MB DDR2

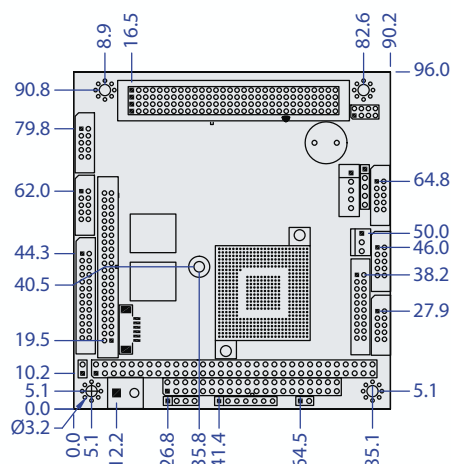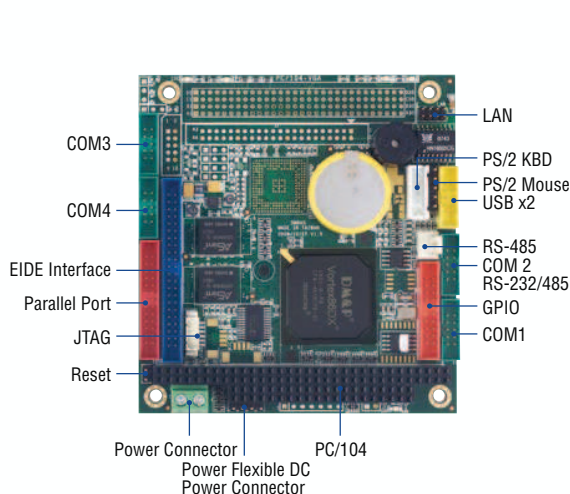

Unit: mm

Specifications



SoC	DM&P SoC CPU Vortex86DX- 800MHz Real Time Clock with Lithium Battery Backup
Cache	L1:16K I-Cache, 16K D-Cache L2 Cache 128KB
Bus	PC/104 standard compliant PCI-104 (Optional)
BIOS	AMI BIOS
System Memory	256/512MB DDR2 Onboard
Watchdog Timer	Software programmable from 30.5μ sec.to 512 sec. x 2 sets (Watchdog 1 fully compatible with M6117D)
Flash Disk Support	Onboard 4MB SPI Flash Disk MSTI EmbedDisk Module (16MB and above) 44-pin IDE to Micro SD (Optional)
PWM	16~24 Channels
I/O Interface	Enhanced IDE port (UltraDMA-100/66/33) x1 RS-232 port x3 RS-232/485 port x1 USB port (Ver2.0) x2 Parallel port x1 16-bit GPIO port x1 10/100Mbps Ethernet port x1
Connectors	2.0mm 44-pin box header for IDE x1 2.0mm 26-pin box header for Printer x1 2.0mm 20-pin box header for 16-bit GPIO x1 2.0mm 10-pin box header for USB x1 2.0mm 10-pin box header for RS-232 x4 2.0mm 8-pin header for Ethernet x1 2.54mm 5-pin box header for Keyboard x1 2.54mm 5-pin header for Mouse x1 2.54mm 3-pin header for RS-485 x1 2.54mm 2-pin header for Reset x1 2.54mm 7-pin header for Redundancy Signal x1 (Optional) 2.54mm 2-pin header for System-Fail-SW x1 (Optional) 1.25mm 6-pin wafer for JTAG x1
Power Requirement	Single Voltage +5V @ 400mA
Weight	77g
Board Size	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)

Packing List

- VDX-6350E x1
- CD for User's Manual & Driver x1
- Cable
 - HDD 44P (2.0) x1
 - PRINT (2.0) x1
 - RS-232 (2.0) x4
 - USB (2.0) x1
 - GPIO (2.0) x1
 - PS2 KB White x1
 - PS2 Mouse Black x1
- Screw Kit x1

Ordering information:

- **VDX-6350E** Vortex86DX PC/104 CPU Module with 256MB DDR2
- **VDX-6350E-PLUS** Vortex86DX PC/104+ CPU Module with 256MB DDR2
- **VDX-6350E-512** Vortex86DX PC/104 CPU Module with 512MB DDR2

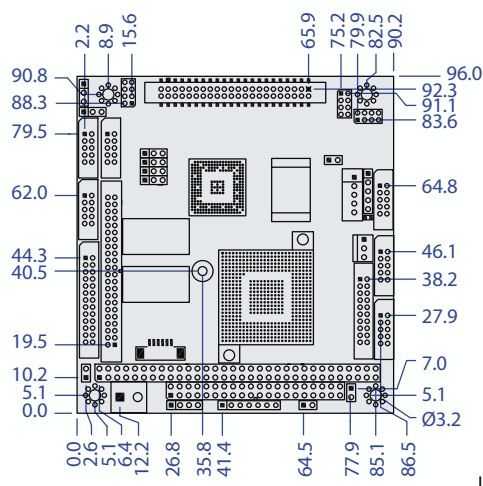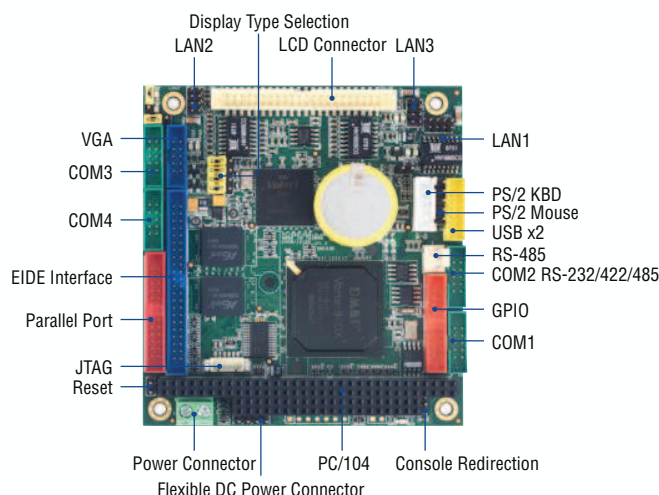

Unit: mm

Specifications

SoC	DM&P SoC CPU Vortex86DX- 800MHz Real Time Clock with Lithium Battery Backup
Cache	L1:16K I-Cache, 16K D-Cache L2 Cache 128KB
Bus	PC/104 standard compliant
BIOS	AMI BIOS
System Memory	256/512MB DDR2 Onboard
Watchdog Timer	Software programmable from 30.5μ sec.to 512 sec. x 2 sets (Watchdog 1 fully compatible with M6117D)
VGA	XGI Volari Z9s Chipset VGA and TFT Flat Panel Interface Support Onboard 32MB VGA Memory, support resolution up to 1280 x 1024, 16M colors
LAN	Integrated 10/100Mbps Ethernet Realtek 8100B 10/100Mbps Ethernet Controller Half/Full duplex capability
Flash Disk Support	Onboard 4MB SPI Flash Disk MSTI EmbedDisk Module (16MB and above) 44-pin IDE to Micro SD (Optional)
PWM	16~24 Channels
SRAM support	512KB (Optional)
I/O Interface	Enhanced IDE port (UltraDMA-100/66/33) x1 RS-232 port x3 RS-232/422/485 port x1 USB port (Ver2.0) x2 Parallel port x1 16-bit GPIO port x1 10/100Mbps Ethernet port x3
Connectors	2.0mm 44-pin box header for IDE x1 2.0mm 44-pin box header for LCD x1 2.0mm 10-pin box header for VGA x1 2.0mm 10-pin box header for USB x1 2.0mm 26-pin box header for Printer x1 2.0mm 20-pin box header for 16-bit GPIO x1 2.0mm 10-pin box header for RS-232 x4 2.0mm 8-pin header for Ethernet x3 2.54mm 5-pin box header for Keyboard x1 2.54mm 5-pin header for Mouse x1 2.54mm 4-pin header for -5V, -12V +12V, GND, DC-in x1 2.54mm 3-pin header for RS-485 x1 2.54mm 2-pin header for Reset x1 2.54mm 7-pin header for Redundancy Signal x1 (Optional) 2.54mm 2-pin header for System-Fail-SW x1(Optional) 1.25mm 6-pin wafer for JTAG x1
Power Requirement	Single Voltage +5V @ 800mA
Weight	90g



Board Size	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)

Packing List

- VDX-6357 x1
- CD for User's Manual & Driver x1
- Cable
 - HDD 44P (2.0) x1
 - PRINT (2.0) x1
 - VGA (2.0) x1
 - RS-232 (2.0) x4
 - NET 4x2 (2.0) x3
 - GPIO (2.0) x1
 - PS2 KB White x1
 - PS2 Mouse Black x1
- Screw Kit x1

Ordering information

- **VDX-6357** Vortex86DX PC/104 CPU Module with 256MB DDR2
- **VDX-6357-512** Vortex86DX PC/104 CPU Module with 512MB DDR2

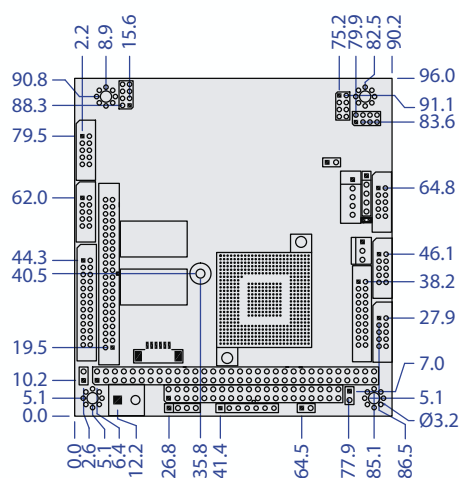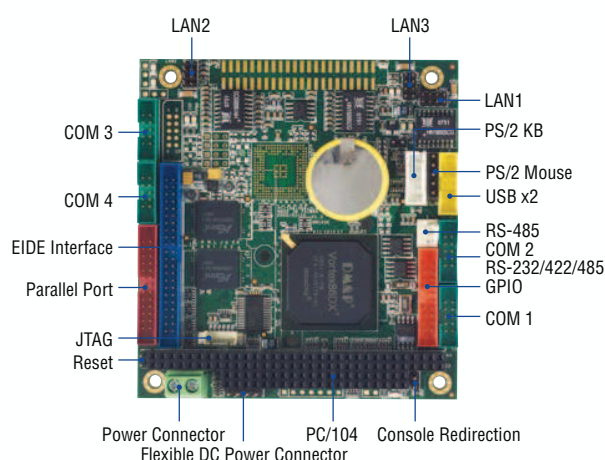

Unit: mm

Specifications

SoC	DM&P SoC CPU Vortex86DX- 800MHz Real Time Clock with Lithium Battery Backup
Cache	L1:16K I-Cache, 16K D-Cache L2 Cache 128KB
Bus	PC/104 standard compliant
BIOS	AMI BIOS
System Memory	256/512MB DDR2 Onboard
Watchdog Timer	Software programmable from 30.5μsec.to 512 sec. x 2 sets (Watchdog 1 fully compatible with M6117D)
LAN	Integrated 10/100Mbps Ethernet Realtek 8100B 10/100Mbps Ethernet Controller Half/Full duplex capability
Flash Disk Support	Onboard 4MB SPI Flash Disk MSTI EmbedDisk Module (16MB and above) 44-pin IDE to Micro SD (Optional)
PWM	16~24 Channels
SRAM support	512KB (Optional)
I/O Interface	Enhanced IDE port (UltraDMA-100/66/33) x1 RS-232 port x3 RS-232/422/485 port x1 USB port (Ver2.0) x2 Parallel port x1 16-bit GPIO port x1 10/100Mbps Ethernet port x3
Connectors	2.0mm 44-pin box header for IDE x1 2.0mm 10-pin box header for USB x1 2.0mm 26-pin box header for Printer x1 2.0mm 20-pin box header for 16-bit GPIO x1 2.0mm 10-pin box header for RS-232 x4 2.0mm 8-pin header for Ethernet x3 2.54mm 5-pin box header for Keyboard x1 2.54mm 5-pin header for Mouse x1 2.54mm 4-pin header for -5V, -12V +12V, GND, DC-in x1 2.54mm 3-pin header for RS-485 x1 2.54mm 2-pin header for Reset x1 2.54mm 7-pin header for Redundancy Signal x1 (Optional) 2.54mm 2-pin header for System-Fail-SW x1 (Optional) 1.25mm 6-pin wafer for JTAG x1
Power Requirement	Single Voltage +5V @ 460mA
Weight	84g



Board Size	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)

Packing List

- VDX-6356 x1
- CD for User's Manual & Driver x1
- Cable
 - HDD 44P (2.0) x1
 - PRINT (2.0) x1
 - RS-232 (2.0) x4
 - NET 4x2 (2.0) x3
 - GPIO (2.0) x1
 - PS2 KB White x1
 - PS2 Mouse Black x1
- Screw Kit x1

Ordering information

- **VDX-6356** Vortex86DX PC/104 CPU Module with 256MB DDR2
- **VDX-6356-512** Vortex86DX PC/104 CPU Module with 512MB DDR2

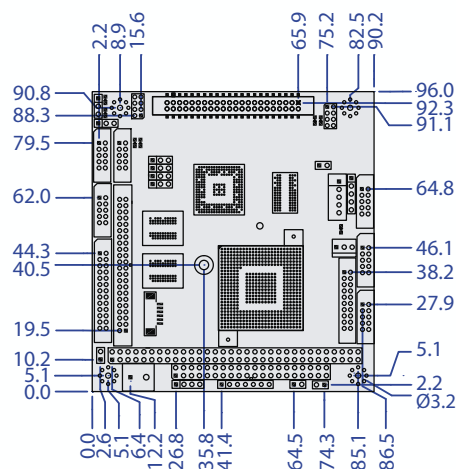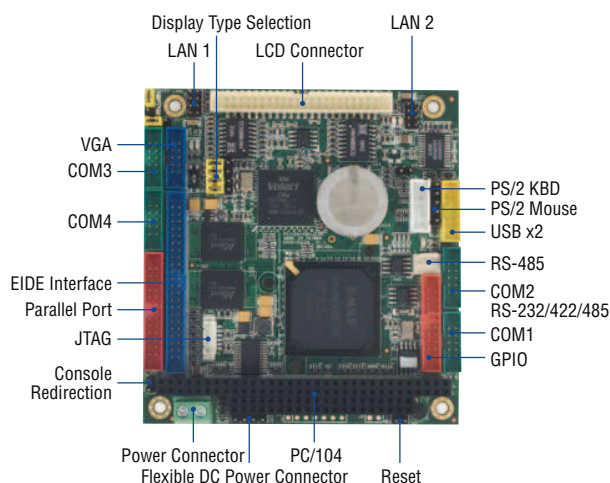

Unit: mm

Specifications

SoC	DM&P SoC CPU Vortex86DX- 800MHz Real Time Clock with Lithium Battery Backup
Cache	L1:16K I-Cache, 16K D-Cache L2 Cache 128KB
Bus	PC/104 standard compliant
BIOS	AMI BIOS
System Memory	256/512MB DDR2 Onboard
Watchdog Timer 0 & 1 Sets	Software programmable from 30.5μ sec.to 512 sec. x 2 sets (Watchdog 1 fully compatible with M6117D)
VGA	XGI Volari Z9s Chipset VGA and TFT Flat Panel Interface Support Onboard 32MB VGA Memory, support resolution up to 1600x1200, 256 colors
LAN	Realtek 8100B 10/100Mbps Ethernet Controller Half/Full duplex capability
Flash Disk Support	Onboard 4MB SPI Flash Disk MSTI EmbedDisk Module (16MB and above) 44-pin IDE to Micro SD (Optional)
PWM	16-24 Channels
SRAM support	512KB (Optional)
I/O Interface	Enhanced IDE port (UltraDMA-100/66/33) x1 RS-232 port x3 RS-232/422/485 port x1 USB port (Ver2.0) x2 Parallel port x1 16-bit GPIO port x1 10/100Mbps Ethernet port x2
Connectors	2.0mm 44-pin box header for IDE x1 2.0mm 44-pin box header for LCD x1 2.0mm 10pin box header for VGA x1 2.0mm 10pin box header for USB x1 2.0mm 26-pin box header for Printer x1 2.0mm 20-pin box header for 16-bit GPIO x1 2.0mm 10-pin box header for RS-232 x4 2.0mm 8-pin header for Ethernet x2 2.5mm 5-pin box header for Keyboard x1 2.5mm 5-pin box header for Mouse x1 2.54mm 4-pin header for -5V, -12V +12V, GND, DC-in x1 2.54mm 3-pin header for RS-485 x1 2.54mm 2-pin header for Reset x1 2.54mm 7-pin header for Redundancy Signal x1 (Optional) 2.54mm 2-pin header for System-Fail-SW x1 (Optional) 1.25mm 6-pin wafer for JTAG x1
Power Requirement	Single Voltage +5V @ 800mA
Weight	83g
Board Size	90 x 96mm (3.54 x 3.77 inches)



Operating Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)
------------------------------	---

Packing List

- VDX-6358 x1
- CD for User's Manual & Driver x1
- Cable
 - HDD 44P (2.0) x1
 - PRINT (2.0) x1
 - VGA (2.0) x1
 - RS-232 (2.0) x4
 - NET 4x2 (2.0) x2
 - GPIO (2.0) x1
 - PS2 KB White x1
 - PS2 Mouse Black x1
- Screw Kit x1

Ordering information

- **VDX-6358** Vortex86DX PC/104 CPU Module with 256MB DDR2
- **VDX-6358-512** Vortex86DX PC/104 CPU Module with 512MB DDR2

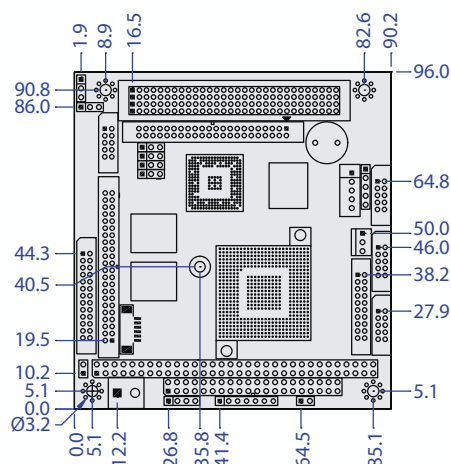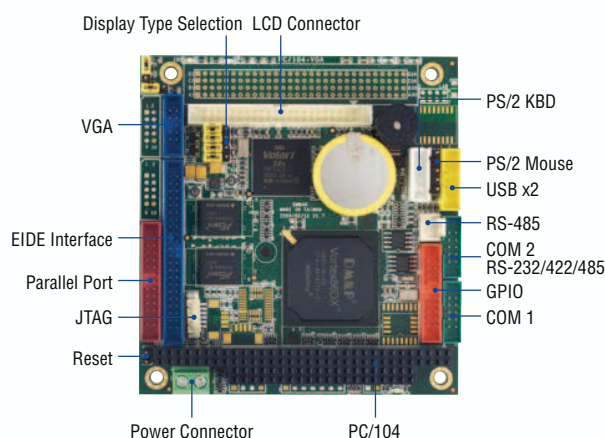

Unit: mm

Specifications

SoC	DM&P SoC CPU Vortex86DX- 600MHz Real Time Clock with Lithium Battery Backup
Cache	L1:16K I-Cache, 16K D-Cache L2 Cache 128KB
Bus	PC/104 standard compliant PCI-104 (Optional)
BIOS	AMI BIOS
System Memory	128MB DDR2 Onboard
Watchdog Timer 0 & 1 Sets	Software programmable from 30.5μ sec.to 512 sec. x 2 sets (Watchdog 1 fully compatible with M6117D)
VGA	XGI Volari Z9s Chipset VGA and TFT Flat Panel Interface Support Onboard 32MB VGA Memory, support resolution up to 1280x1024, 16M colors
Flash Disk Support	MSTI EmbedDisk Module (16MB and above) 44-pin IDE to Micro SD (Optional)
PWM	16~24 Channels
I/O Interface	Enhanced IDE port (UltraDMA-100/66/33) x1 RS-232 port x1 RS-232/422/485 port x1 USB port (Ver2.0) x2 Parallel port x1 16-bit GPIO port x1
Connectors	2.0mm 44-pin box header for IDE x1 2.0mm 44-pin box header for LCD x1 2.0mm 26-pin box header for Printer x1 2.0mm 20-pin box header for 16-bit GPIO x1 2.0mm 10-pin box header for VGA x1 2.0mm 10-pin box header for USB x1 2.0mm 10-pin box header for RS-232 x2 2.54mm 5-pin box header for Keyboard x1 2.54mm 5-pin header for Mouse x1 2.54mm 3-pin header for RS-485 x1 2.54mm 2-pin header for Reset x1 2.54mm 7-pin header for Redundancy Signal x1 (Optional) 2.54mm 2-pin header for System-Fail-SW x1 (Optional) 1.25mm 6-pin wafer for JTAG x1
Power Requirement	Single Voltage +5V @ 600mA
Weight	80g

Board Size	90 x 96mm (3.54 x 3.77 inches)
-------------------	--------------------------------

Operating Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)
------------------------------	---

Packing List



- VDX-6372 x1
- CD for User's Manual & Driver x1
- Cable
 - HDD 44P (2.0) x1
 - PRINT (2.0) x1
 - VGA (2.0) x1
 - RS-232 (2.0) x2
 - USB (2.0) x1
 - GPIO (2.0) x1
 - PS2 KB White x1
 - PS2 Mouse Black x1
- Screw Kit x1

Ordering information

- **VDX-6372** Vortex86DX PC/104 CPU Module with 128MB DDR2
- **VDX-6372-PLUS** Vortex86DX PC/104+ CPU Module with 128MB DDR2

VSX-6153-V2

128MB/4S/2USB/VGA/LCD/LVDS/LAN/GPIO/CF

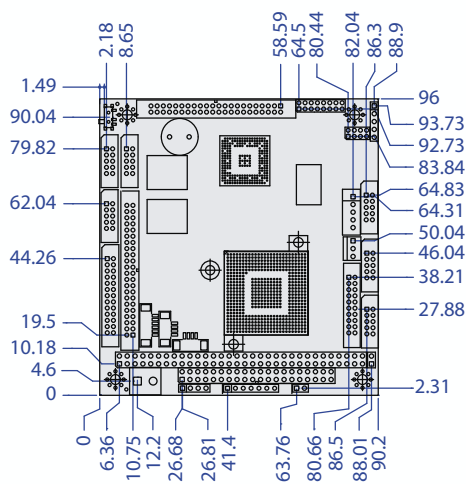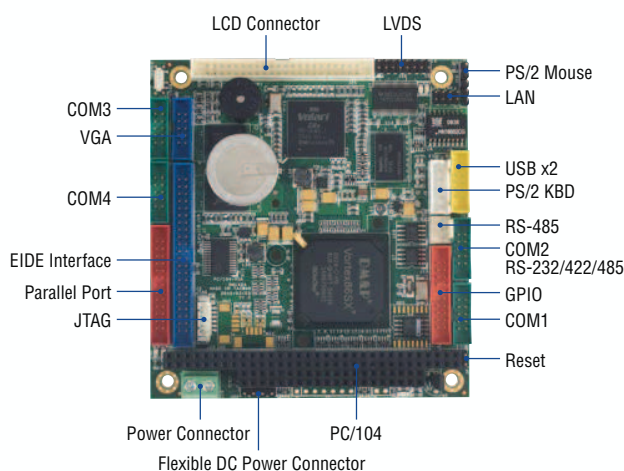

Unit: mm

Specifications

SoC	DM&P SoC CPU Vortex86SX- 300MHz Real Time Clock with Lithium Battery Backup
Cache	L1:16K I-Cache, 16K D-Cache
Bus	PC/104 standard compliant
BIOS	AMI BIOS
System Memory	128/256MB DDR2 Onboard
Watchdog Timer	Software programmable from 30.5μ sec.to 512 sec. x 2 sets (Watchdog 1 fully compatible with M6117D)
VGA	XGI Volari Z9s Chipset VGA and TFT/LVDS Flat Panel Interface Support Onboard 32MB VGA Memory, support resolution up to 1280x1024, 16M colors
LAN	Integrated 10/100Mbps Ethernet
Audio	CM119 USB audio controller (Optional)
Flash Disk Support	Onboard 2MB SPI Flash Disk MSTI EmbedDisk Module (16MB and above) Compact Flash Type I/II
I/O Interface	Enhanced IDE port x1 RS-232 port x3 RS-232/422/485 port x1 USB port (Ver2.0) x2 Parallel port x1 16-bit GPIO port x1 10/100Mbps Ethernet port x1
Connectors	2.0mm 44-pin box header for IDE x1 2.0mm 44-pin box header for LCD x1 2.0mm 26-pin box header for Printer x1 2.0mm 20-pin box header for 16-bit GPIO x1 2.0mm 16-pin header for LVDS x1 2.0mm 10-pin box header for VGA x1 2.0mm 10-pin box header for USB x1 2.0mm 10-pin box header for RS-232 x4 2.0mm 8-pin header for Ethernet x1 2.54mm 5-pin box header for Keyboard x1 2.54mm 5-pin header for Mouse x1 2.54mm 4-pin header for -5V, -12V +12V, GND x1 2.54mm 3-pin header for RS-485 x1 2.54mm 2-pin header for Reset x1 2.54mm 7-pin header for Redundancy Signal x1 (Optional) 2.54mm 2-pin header for System-Fail-SW x1 (Optional) 1.25mm 6-pin wafer for JTAG x1 1.25mm 4-pin wafer for Line-out/MIC-in x2 (Optional)
Power Requirement	Single Voltage +5V @ 480mA
Weight	90g
Board Size	90 x 96mm (3.54 x 3.77 inches)

Operating Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)
------------------------------	---

Packing List

- VSX-6153-V2 x1
- CD for User's Manual & Driver x1
- Cable
 - HDD 44P (2.0) x1
 - PRINT (2.0) x1
 - VGA (2.0) x1
 - RS-232 (2.0) x4
 - USB (2.0) x1
 - NET 4 x 2 (2.0) x1
 - GPIO (2.0) x1
 - PS2 KB White x1
 - PS2 Mouse Black x1
- Screw Kit x1

Ordering information

- VSX-6153-V2** Vortex86SX PC/104 CPU Module with 128MB DDR2



Compact Flash Type I/II



VSX-6153-V2

VSX-6154-V2

128MB/4S/2USB/VGA/LCD/LAN/GPIO

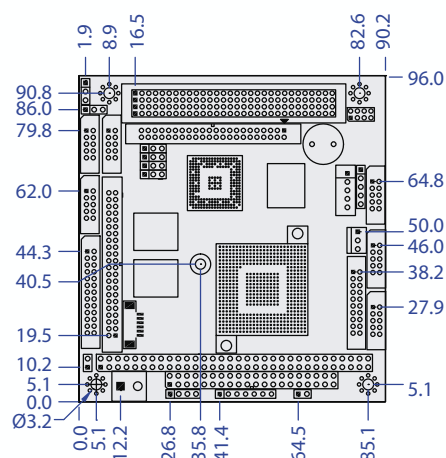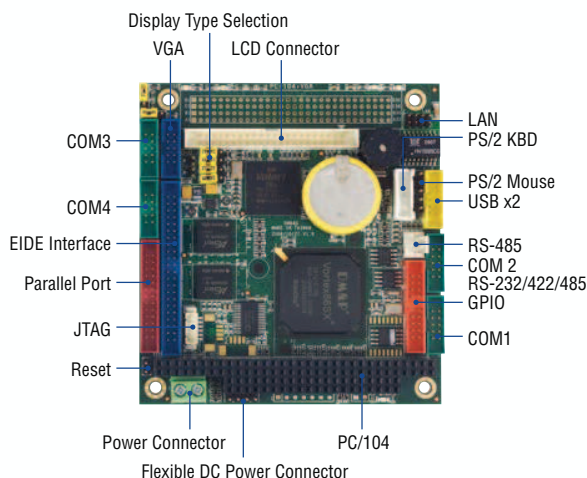

Unit: mm

Specifications

SoC	DM&P SoC CPU Vortex86SX- 300MHz Real Time Clock with Lithium Battery Backup
Cache	L1:16K I-Cache, 16K D-Cache
Bus	PC/104 standard compliant PCI-104 (Optional)
BIOS	AMI BIOS
System Memory	128/256MB DDR2 Onboard
Watchdog Timer 0 & 1 Sets	Software programmable from 30.5 μ sec. to 512 sec. x 2 sets (Watchdog 1 fully compatible with M6117D)
VGA	XGI Volari Z9s Chipset VGA and TFT Flat Panel Interface Support Onboard 32MB VGA Memory, support resolution up to 1280 x 1024, 16M colors
LAN	Integrated 10/100Mbps Ethernet
Flash Disk Support	Onboard 2MB SPI Flash Disk MSTI EmbedDisk Module (16MB and above)
I/O Interface	Enhanced IDE port x1 RS-232 port x3 RS-232/422/485 port x1 USB port (Ver2.0) x2 Parallel port x1 16-bit GPIO port x1 10/100Mbps Ethernet port x1
Connectors	2.0mm 44-pin box header for IDE x1 2.0mm 44-pin box header for LCD x1 2.0mm 26-pin box header for Printer x1 2.0mm 20-pin box header for 16-bit GPIO x1 2.0mm 10-pin box header for VGA x1 2.0mm 10-pin box header for USB x1 2.0mm 10-pin box header for RS-232 x4 2.0mm 8-pin header for Ethernet x1 2.54mm 5-pin box header for Keyboard x1 2.54mm 5-pin header for Mouse x1 2.54mm 7-pin header for Redundancy Signal x1 (Optional) 2.54mm 4-pin header for -5V, -12V, +12V, GND, DC-in x1 2.54mm 3-pin header for RS-485 x1 2.54mm 2-pin header for Reset x1 2.54mm 2-pin header for System-Fail-SW x1 (Optional) 1.25mm 6-pin wafer for JTAG x1



Power Requirement	Single Voltage +5V @ 720mA
Weight	83g
Board Size	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)

Packing List

- VSX-6154-V2 x1
- CD for User's Manual & Driver x1
- Cable
 - HDD 44P (2.0) x1
 - USB (2.0) x1
 - PRINT (2.0) x1
 - VGA (2.0) x1
 - RS-232 (2.0) x4
 - NET 4x2 (2.0) x1
 - GPIO (2.0) x1
 - PS2 KB White x1
 - PS2 Mouse Black x1
- Screw Kit x1

Ordering information

- VSX-6154-V2** Vortex86SX PC/104 CPU Module with 128MB DDR2
- VSX-6154-V2-PLUS** Vortex86SX PC/104+ CPU Module with 128MB DDR2

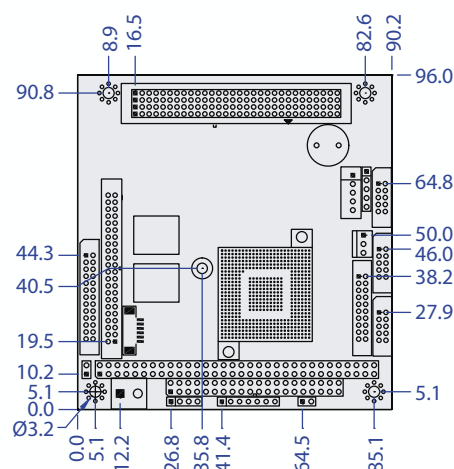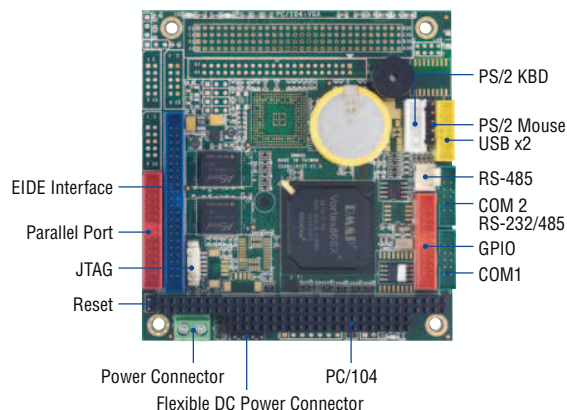

Unit: mm

Specifications

SoC	DM&P SoC CPU Vortex86SX- 300MHz Real Time Clock with Lithium Battery Backup
Cache	L1:16K I-Cache, 16K D-Cache
Bus	PC/104 standard compliant PCI-104 (Optional)
BIOS	AMI BIOS
System Memory	128/256MB DDR2 Onboard
Watchdog Timer 0 & 1 Sets	Software programmable from 30.5μ sec. to 512 sec. x 2 sets (Watchdog 1 fully compatible with M6117D)
Flash Disk Support	Onboard 2MB SPI Flash Disk MSTI EmbedDisk Module (16MB and above)
I/O Interface	Enhanced IDE port x1 RS-232 port x1 RS-232/485 port x1 USB port (Ver2.0) x2 Parallel port x1 16-bit GPIO port x1
Connectors	2.0mm 44-pin box header for IDE x1 2.0mm 26-pin box header for Printer x1 2.0mm 20-pin box header for 16-bit GPIO x1 2.0mm 10pin box header for USB x1 2.0mm 10-pin box header for RS-232 x2 2.54mm 5-pin box header for Keyboard x1 2.54mm 5-pin box header for Mouse x1 2.54mm 7-pin header for Redundancy Signal x1 (Optional) 2.54mm 4-pin header for -5V, -12V, +12V, GND, DC-in x1 2.54mm 3-pin header for RS-485 x1 2.54mm 2-pin header for Reset x1 2.54mm 2-pin header for System-Fail-SW x1 (Optional) 1.25mm 6-pin wafer for JTAG x1
Power Requirement	Single Voltage +5V @ 320mA
Weight	75g
Board Size	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)

Packing List

- VSX-6150-V2 x1
- CD for User's Manual & Driver x1
- Cable
 - HDD 44P (2.0) x1
 - USB (2.0) x1
 - PRINT (2.0) x1
 - RS-232 (2.0) x2
 - GPIO (2.0) x1
 - PS2 KB White x1
 - PS2 Mouse Black x1
- Screw Kit x1

Ordering information

- VSX-6150-V2** Vortex86SX PC/104 CPU Module with 128MB DDR2
- VSX-6150-V2-PLUS** Vortex86SX PC/104+ CPU Module with 128MB DDR2

1

μProcessor
Module

2

Mity/Tiny CPU
Module

3

PC/104 CPU
Module

4

Half-Size CPU
Module

5

3.5" CPU
Module

6

Peripheral
Module

7



Display Product
Series

8

Accessories &
Technical Information

VSX-6150E-V2

128MB/4S/2USB/LAN/GPIO

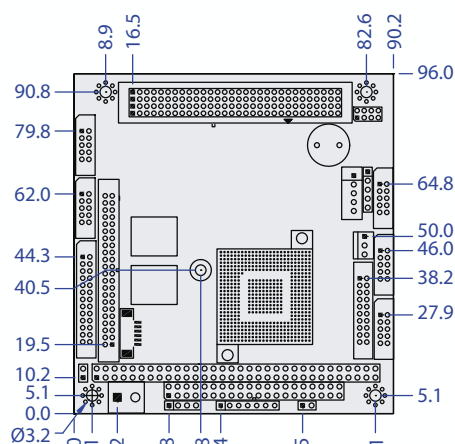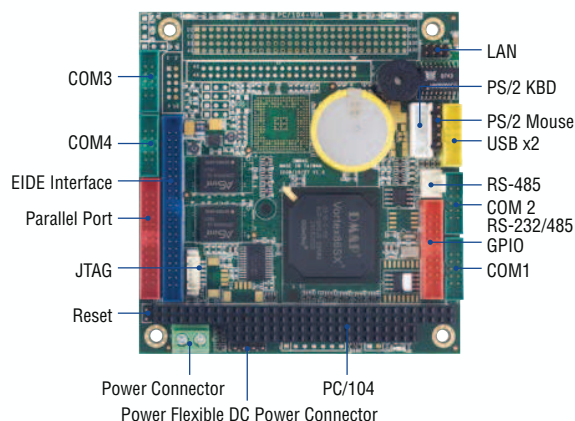

Unit: mm

Specifications

SoC	DM&P SoC CPU Vortex86SX- 300MHz Real Time Clock with Lithium Battery Backup
Cache	L1:16K I-Cache, 16K D-Cache
Bus	PC/104 standard compliant PCI-104 (Optional)
BIOS	AMI BIOS
System Memory	128/256MB DDR2 Onboard
Watchdog Timer 0 & 1 Sets	Software programmable from 30.5μ sec. to 512 sec. x 2 sets (Watchdog 1 fully compatible with M6117D)
LAN	Integrated 10/100Mbps Ethernet
Flash Disk Support	Onboard 2MB SPI Flash Disk MSTI EmbedDisk Module (16MB and above)
I/O Interface	Enhanced IDE port x1 RS-232 port x3 RS-232/485 port x1 USB port (Ver2.0) x2 Parallel port x1 16-bit GPIO port x1 10/100Mbps Ethernet port x1
Connectors	2.0mm 44-pin box header for IDE x1 2.0mm 26-pin box header for Printer x1 2.0mm 20-pin box header for 16-bit GPIO x1 2.0mm 10-pin box header for USB x1 2.0mm 10-pin box header for RS-232 x4 2.0mm 8-pin header for Ethernet x1 2.54mm 5-pin box header for Keyboard x1 2.54mm 5-pin box header for Mouse x1 2.54mm 7-pin header for Redundancy Signal x1 (Optional) 2.54mm 4-pin header for -5V, -12V, +12V, GND, DC-in x1 2.54mm 3-pin header for RS-485 x1 2.54mm 2-pin header for Reset x1 2.54mm 2-pin header for System-Fail-SW x1 (Optional) 1.25mm 6-pin wafer for JTAG x1
Power Requirement	Single Voltage +5V @ 400mA
Weight	77g

Board Size	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)

Packing List



- VSX-6150E-V2 x1
- CD for User's Manual & Driver x1
- Cable
 - HDD 44P (2.0) x1
 - USB (2.0) x1
 - PRINT (2.0) x1
 - RS-232 (2.0) x4
 - NET 4x2 (2.0) x1
 - GPIO (2.0) x1
 - PS2 KB White x1
 - PS2 Mouse Black x1
- Screw Kit x1

Ordering information

- VSX-6150E-V2** Vortex86SX PC/104 CPU Module with 128MB DDR2
- VSX-6150E-V2-PLUS** Vortex86SX PC/104+ CPU Module with 128MB DDR2

VSX-6155-V2

128MB/4S/2USB/VGA/LCD/AUDIO/LAN/GPIO

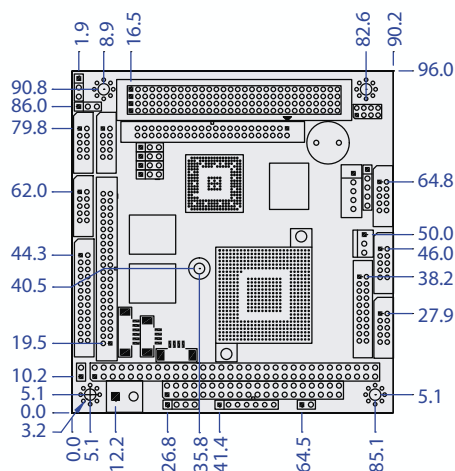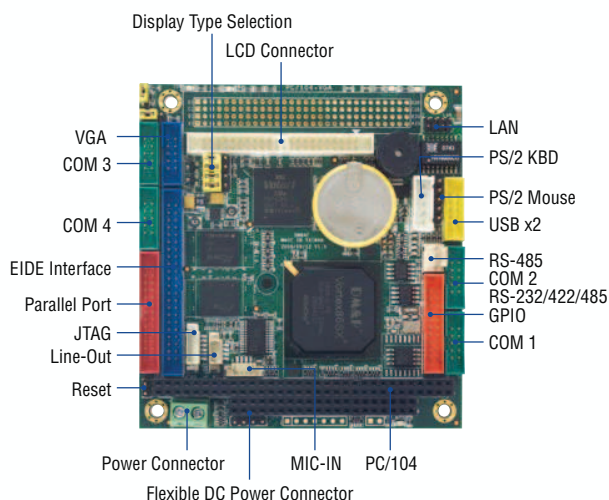

Unit: mm

Specifications

SoC	DM&P SoC CPU Vortex86SX- 300MHz Real Time Clock with Lithium Battery Backup
Cache	L1:16K I-Cache, 16K D-Cache
Bus	PC/104 standard compliant PCI-104 (Optional)
BIOS	AMI BIOS
System Memory	128/256MB DDR2 Onboard
Watchdog Timer	Software programmable from 30.5μ sec.to 512 sec. x 2 sets (Watchdog 1 fully compatible with M6117D)
VGA	XGI Volari Z9s Chipset VGA and TFT Flat Panel Interface Support Onboard 32MB VGA Memory, support resolution up to 1280x1024, 16M colors
LAN	Integrated 10/100Mbps Ethernet
Audio	CM119 USB Audio controller
Flash Disk Support	Onboard 2MB SPI Flash Disk MSTI EmbedDisk Module (16MB and above)
I/O Interface	Enhanced IDE port x1 RS-232 port x3 RS-232/422/485 port x1 USB port (Ver2.0) x2 Parallel port x1 16-bit GPIO port x1 10/100Mbps Ethernet port x1
Connectors	2.0mm 44-pin box header for IDE x1 2.0mm 44-pin box header for LCD x1 2.0mm 10pin box header for VGA x1 2.0mm 10pin box header for USB x1 2.0mm 26-pin box header for Printer x1 2.0mm 20-pin box header for 16-bit GPIO x1 2.0mm 10-pin box header for RS-232 x4 2.0mm 8-pin header for Ethernet x1 2.54mm 5-pin box header for Keyboard x1 2.54mm 5-pin header for Mouse x1 2.54mm 4-pin header for -5V, -12V +12V, GND, DC-in x1 2.54mm 3-pin header for RS-485 x1 2.54mm 2-pin header for Reset x1 2.54mm 7-pin header for Redundancy Signal x1 (Optional) 2.54mm 2-pin header for System-Fail-SW x1 (Optional) 1.25mm 6-pin wafer for JTAG x1 1.25mm 4-pin wafer for Line-out/MIC-in x2
Power Requirement	Single Voltage +5V @ 620mA

Weight	90g
Board Size	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)

Packing List

- VSX-6155-V2 x1
- CD for User's Manual & Driver x1
- Cable
 - HDD 44P (2.0) x1
 - PRINT (2.0) x1
 - VGA (2.0) x1
 - RS-232 (2.0) x4
 - USB (2.0) x1
 - NET 4x2 (2.0) x1
 - GPIO (2.0) x1
 - Audio Line x2
 - PS2 KB White x1
 - PS2 Mouse Black x1
- Screw Kit x1

Ordering information:

- VSX-6155-V2** Vortex86SX PC/104 CPU Module with 128MB DDR2
- VSX-6155-V2-PLUS** Vortex86SX PC/104+ CPU Module with 128MB DDR2

1

μProcessor
Module

2

Mity/Tiny CPU
Module

3

PC/104 CPU
Module

4

Half-Size CPU
Module

5

3.5" CPU
Module

6



Peripheral
Module

7

Display Product
Series

8

Accessories &
Technical Information

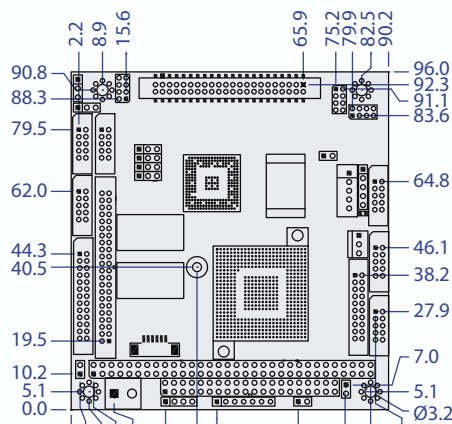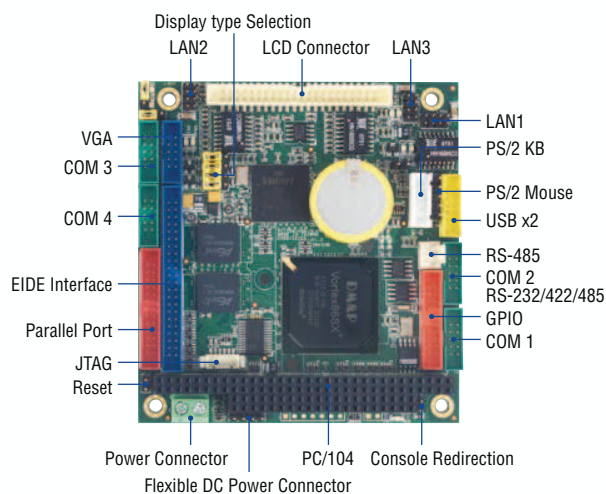

Unit: mm

Specifications

SoC	DM&P SoC CPU Vortex86SX- 300MHz Real Time Clock with Lithium Battery Backup
Cache	L1:16K I-Cache, 16K D-Cache
Bus	PC/104 standard compliant
BIOS	AMI BIOS
System Memory	128/256MB DDR2 Onboard
Watchdog Timer0 & 1 Sets	Software programmable from 30.5μ sec. to 512 sec. x 2 sets (Watchdog 1 fully compatible with M6117D)
VGA	XGI Volari Z9s Chipset VGA and TFT/LVDS Flat Panel Interface Support Onboard 32MB VGA Memory, support resolution up to 1280 x 1024, 16M colors
LAN	Integrated 10/100Mbps Ethernet Realtek 8100B 10/100Mbps Ethernet Controller Half/Full Duplex Capability
Flash Disk Support	Onboard 2MB SPI Flash Disk MSTI EmbedDisk Module (16MB and above)
SRAM support	512KB (Optional)
I/O Interface	Enhanced IDE port x1 RS-232 port x3 RS-232/422/485 port x1 USB port (Ver2.0) x2 Parallel port x1 16-bit GPIO port x1 10/100Mbps Ethernet port x3
Connectors	2.0mm 44-pin box header for IDE x1 2.0mm 44-pin box header for LCD x1 2.0mm 10pin box header for VGA x1 2.0mm 10pin box header for USB x1 2.0mm 26-pin box header for Printer x1 2.0mm 20-pin box header for 16-bit GPIO x1 2.0mm 10-pin box header for RS-232 x4 2.0mm 8-pin header for Ethernet x3 2.5mm 5-pin box header for Keyboard x1 2.5mm 5-pin header for Mouse x1 2.54mm 4-pin header for -5V, -12V, +12V, GND, DC-in x1 2.54mm 3-pin header for RS-485 x1 2.54mm 2-pin header for Reset x1 2.54mm 7-pin header for Redundancy Signal x1 (Optional) 2.54mm 2-pin header for System-Fail-SW x1 (Optional) 1.25mm 6-pin wafer for JTAG x1

Power Requirement	Single Voltage +5V @ 680mA
Weight	90g
Board Size	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)

Packing List



- VSX-6157-V2 x1
- CD for User's Manual & Driver x1
- Cable
 - HDD 44P (2.0) x1
 - PRINT (2.0) x1
 - VGA (2.0) x1
 - RS-232 (2.0) x4
 - NET 4x2 (2.0) x3
 - GPIO (2.0) x1
 - PS2 KB White x1
 - PS2 Mouse Black x1
- Screw Kit x1

Ordering information

- VSX-6157-V2** Vortex86SX PC/104 CPU Module with 128MB DDR2

VSX-6156-V2

128MB/4S/2USB/3LAN/GPIO

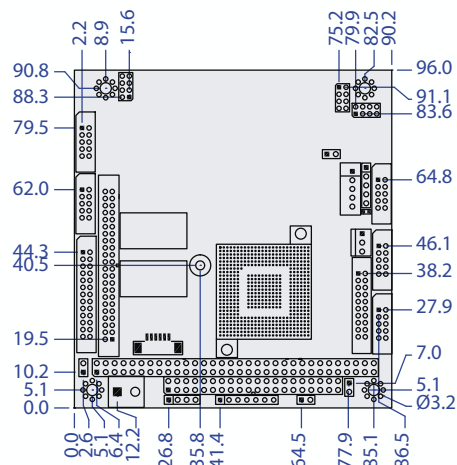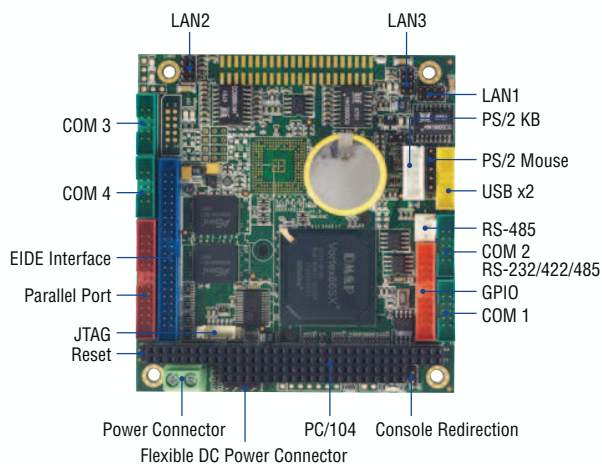

Specifications

SoC	DM&P SoC CPU Vortex86SX- 300MHz Real Time Clock with Lithium Battery Backup
Cache	L1:16K I-Cache, 16K D-Cache
Bus	PC/104 standard compliant
BIOS	AMI BIOS
System Memory	128/256MB DDR2 Onboard
Watchdog Timer0 & 1 Sets	Software programmable from 30.5μ sec. to 512 sec. x 2 sets (Watchdog 1 fully compatible with M6117D)
LAN	Integrated 10/100Mbps Ethernet Realtek 8100B 10/100Mbps Ethernet Controller Half/Full Duplex Capability
Flash Disk Support	Onboard 2MB SPI Flash Disk MSTI EmbedDisk Module (16MB and above)
SRAM support	512KB (Optional)
I/O Interface	Enhanced IDE port x1 RS-232 port x3 RS-232/422/485 port x1 USB port (Ver2.0) x2 Parallel port x1 16-bit GPIO port x1 10/100Mbps Ethernet port x3
Connectors	2.0mm 44-pin box header for IDE x1 2.0mm 10pin box header for USB x1 2.0mm 26-pin box header for Printer x1 2.0mm 20-pin box header for 16-bit GPIO x1 2.0mm 10-pin box header for RS-232 x4 2.0mm 8-pin header for Ethernet x3 2.5mm 5-pin box header for Keyboard x1 2.5mm 5-pin header for Mouse x1 2.54mm 4-pin header for -5V, -12V, +12V, GND, DC-in x1 2.54mm 3-pin header for RS-485 x1 2.54mm 2-pin header for Reset x1 2.54mm 7-pin header for Redundancy Signal x1 (Optional) 2.54mm 2-pin header for System-Fail-SW x1 (Optional) 1.25mm 6-pin wafer for JTAG x1
Power Requirement	Single Voltage +5V @ 440mA

Weight	84g
Board Size	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)

Packing List

- VSX-6156-V2 x1
- CD for User's Manual & Driver x1
- Cable
 - HDD 44P (2.0) x1
 - PRINT (2.0) x1
 - RS-232 (2.0) x4
 - NET 4x2 (2.0) x3
 - GPIO (2.0) x1
 - PS2 KB White x1
 - PS2 Mouse Black x1
- Screw Kit x1

Ordering information

- VSX-6156-V2** Vortex86SX PC/104 CPU Module with 128MB DDR2

1

μProcessor
Module

2

Mity/Tiny CPU
Module

3

PC/104 CPU
Module

4

Half-Size CPU
Module

5

3.5" CPU
Module

6

Peripheral
Module

7



Display Product
Series

8

Accessories &
Technical Information

VSX-6158-V2

128MB/4S/2USB/VGA/LCD/2LAN/GPIO

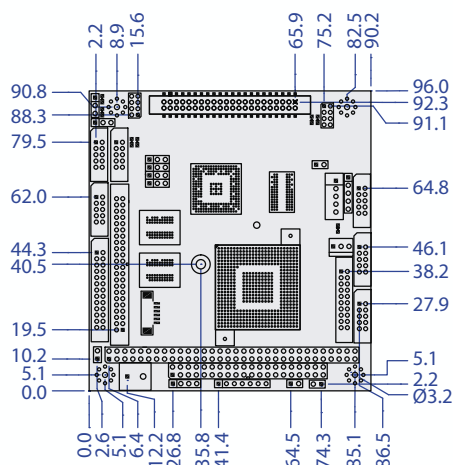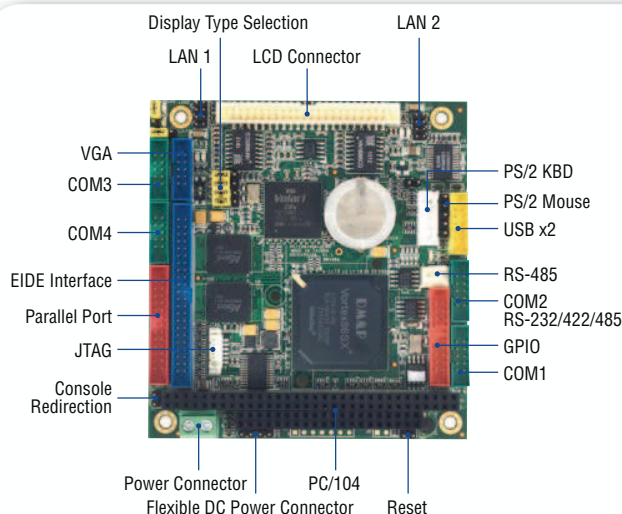

Unit: mm

Specifications

SoC	DM&P SoC CPU Vortex86SX- 300MHz Real Time Clock with Lithium Battery Backup
Cache	L1:16K I-Cache, 16K D-Cache
Bus	PC/104 standard compliant
BIOS	AMI BIOS
System Memory	128/256MB DDR2 Onboard
Watchdog Timer 0 & 1 Sets	Software programmable from 30.5μ sec.to 512 sec. x 2 sets (Watchdog 1 fully compatible with M6117D)
VGA	XGI Volari Z9s Chipset VGA and TFT Flat Panel Interface Support Onboard 32MB VGA Memory, support resolution up to 1600 x 1200, 256 colors
LAN	Realtek 8100B 10/100Mbps Ethernet Controller Half/Full duplex capability
Flash Disk Support	Onboard 2MB SPI Flash Disk MSTI EmbedDisk Module (16MB and above)
SRAM support	512KB (Optional)
I/O Interface	Enhanced IDE port x1 RS-232 port x3 RS-232/422/485 port x1 USB port (Ver2.0) x2 Parallel port x1 16-bit GPIO port x1 10/100Mbps Ethernet port x2
Connectors	2.0mm 44-pin box header for IDE x1 2.0mm 44-pin box header for LCD x1 2.0mm 10pin box header for VGA x1 2.0mm 10pin box header for USB x1 2.0mm 26-pin box header for Printer x1 2.0mm 20-pin box header for 16-bit GPIO x1 2.0mm 10-pin box header for RS-232 x4 2.0mm 8-pin header for Ethernet x2 2.5mm 5-pin box header for Keyboard x1 2.5mm 5-pin box header for Mouse x1 2.54mm 4-pin header for -5V, -12V +12V, GND, DC-in x1 2.54mm 3-pin header for RS-485 x1 2.54mm 2-pin header for Reset x1 2.54mm 7-pin header for Redundancy Signal x1 (Optional) 2.54mm 2-pin header for System-Fail-SW x1 (Optional) 1.25mm 6-pin wafer for JTAG x1
Power Requirement	Single Voltage +5V @ 680mA
Weight	83g
Board Size	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)

Packing List

- VSX-6158-V2 x1
- CD for User's Manual & Driver x1
- Cable
 - HDD 44P (2.0) x1
 - PRINT (2.0) x1
 - VGA (2.0) x1
 - RS-232 (2.0) x4
 - NET 4x2 (2.0) x2
 - GPIO (2.0) x1
 - PS2 KB White x1
 - PS2 Mouse Black x1
- Screw Kit x1

Ordering information

- VSX-6158-V2** Vortex86SX PC/104 CPU Module with 128MB DDR2