

P eripheral Module


6



VSX-2812	PC/104+ VGA/LCD/DVI Module	82
VSX-2812S	PC/104+ VGA/LCD Module	82
MiniPCI-VGA-Z9S	MiniPCI VGA/LVDS Module	83
MiniPCI-L-8100	MiniPCI LAN Module	83
MiniPCI-WLAN-Card	IEEE802.11b/g Mini-PCI Wireless LAN card	84
USB Wireless LAN module	IEEE802.11b/g USB Wireless LAN module	84
ICOP-0070/0071/0072	PC/104 Power Supply Module	85
ICOP-0101	48 Bit Digital I/O Module	86
ICOP-0102	24 bit Digital I/O Module	86
ICOP-1800	4 Ports RS232 Module	86
ICOP-2811	PC/104 VGA/LCD Module	87
ICOP-4087	PC/104 Solid State Disk Module	87
PC104-1918-USB	USB 2.0 PC/104 Module	87
SD-1917	IDE to MicroSD card reader Module	88
ICOP-0096	TFT to LVDS 18bits Converter	88
IDE-SATA26-V-44	2.5" IDE to SATA Module	88
PC104-1911-CF	One Slot Compact Flash to IDE	89
PC104-1911-MINIPCI	PC/104+ MINIPCI Module	89
CF-1915	One Slot Compact Flash to IDE Module	89
CF-1916	One Slot Compact Flash to IDE Module	90
ICOP-0091	PC/104 interface to ISA Bus	90
ICOP-0093	x-ISA interface to ISA Bus	90
ICOP-0097	x-PCI interface to PCI Bus	91
ICOP-0094	IDE Exchange Kit	91
ICOP-0076	LAN Adapter Kit	91
ICOP-8003/8005/8008	3 Slots/5 Slots/8 Slots ISA Backplane	92
Power Supply	Power Adapter and Power Supply	93
EB-206/207/208	Embedded Barebone system	94

VSX-2812

PC/104+ VGA/LCD/DVI Module

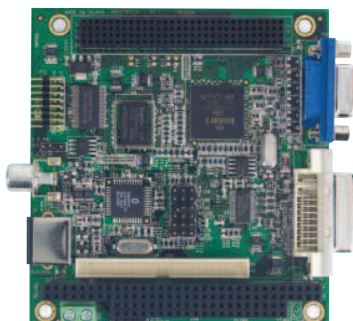

Specifications


Chipset	XGI Volari Z9s Chipset 32-bit PCI bus Support 12-bit, 18-bit, and dual 12-bit Digital Interface Support VGA, DVI, TTL/LVDS, TV-OUT
BIOS	VGA/LCD/TV-OUT BIOS
Video Memory	Onboard 32MB DDR2 Resolution up to 1600 x 1200 @ 16M colors
Bus	PC/104+ standard compliant
Connectors	2.0mm 44-pin box header for LCD x1 2.0mm 16-pin header for LVDS x1 2.54mm 4-pin header for +12V, -12V, -5V DC-in x1 External 15-pin D-Sub female connector for VGA x1 External 29-pin D-Sub female connector for DVI x1 External 4-pin Mini Din connector for composite signal input x1 RCA connector for composite signal input x1
Power Requirement	Single Voltage +5V @ 280mA
Weight	95g
Board Size	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)

Packing List

- VSX-2812 x1
- Screw Kit x1

VSX-2812S

PC/104+ VGA/LCD Module



Specifications


Chipset	XGI Volari Z9s Chipset 32-bit PCI bus Support 12-bit, 18-bit, and dual 12-bit Digital Interface Support VGA, and Flat Panel Display
BIOS	VGA/LCD BIOS
Video Memory	Onboard 32MB DDR2 Resolution up to 1600 x 1200 @ 16M colors
Bus	PC/104+ standard compliant
Connectors	2.0mm 44-pin box header for LCD x1 2.54mm 4-pin header for +12V, -12V, -5V DC-in x1 External 15-pin D-Sub female connector for VGA x1
Power Requirement	Single Voltage +5V @ 200mA
Weight	77g
Board Size	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)

Packing List

- VSX-2812S x1
- Screw Kit x1

MiniPCI-VGA-Z9s

MiniPCI VGA/LVDS Module

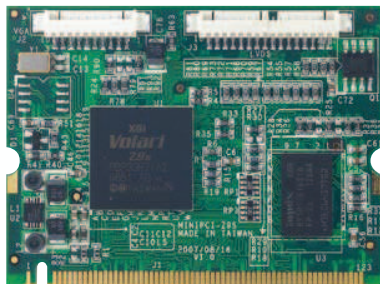

Specifications


Chipset	XGI Volari Z9s Chipset 32-bit PCI bus Support VGA, LVDS Flat Panel Display
BIOS	VGA/LCD BIOS
Video Memory	Onboard 32MB DDR2 Resolution up to 1600 x 1200 @ 16M colors
Bus	Mini-PCI standard compliant
Connectors	1.25mm 10-pin wafer for VGA x1 1.25mm 16-pin wafer for LVDS x1
Power Requirement	Single Voltage +5V @ 80mA
Weight	9g
Board Size	64.7 x 44.6mm (2.54 x 1.76 inches)
Operating Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)

Packing List

- MiniPCI-VGA-Z9s x1
- VGA (1.25) x1

MiniPCI-L-8100

MiniPCI LAN Module

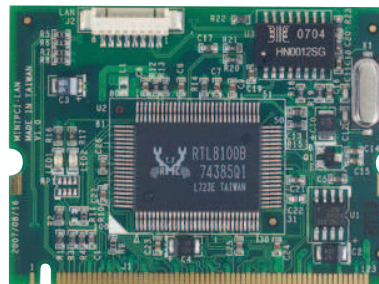

Specifications

Chipset	Realtek 8100B 10/100 Mbps Ethernet Controller Integrated Fast Ethernet MAC, Physical chip and transceiver in one chip Supports 10/100Mbps N-way Auto-negotiation operation Supports Full Duplex Flow Control (IEEE 802.3x) Half/Full duplex capability Compliant to PC99/PC2001
Bus	Mini-PCI standard compliant
Connectors	1.25mm 8-pin wafer for LAN x1
Power Requirement	Single Voltage +5V @ 40mA
Weight	9g
Board Size	64.7 x 44.6mm (2.54 x 1.76 inches)
Operating Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)

Packing List

- MiniPCI-L-8100 x1
- NET (1.25) x1

1

µProcessor
Module

2

Mity/Tiny CPU
Module

3

PC/104 CPU
Module

4

Half-Size CPU
Module

5

3.5" CPU
Module

6

Peripheral
Module

7

Display Product
Series

8

Accessories &
Technical Information

MiniPCI-WLAN-Card USB Wireless LAN module

MiniPCI WLAN Module



Specifications

Chipset	VIA VT6655 Wireless LAN Controller
Bus	Mini-PCI standard compliant
Frequency Band	2400-2483.5MHz (for US, Canada) 2400-2483.5MHz (for Europe) 2400-2497MHz (for Japan)
Operating Channel	IEEE 802.1b, Direct Sequence Spread Spectrum, IEEE 802.11g, Orthogonal Frequency Division Multiplexing 11 Channels (US, Canada) 13 Channels (Europe and Japan)
Driver Support	Windows: 98SE/Me/NT/2000/XP/2003 Ser., Linux (2.4.x/2.6.x), CE (4.2/5.0/6.0) Linux source code available on website
Power consumption	802.11b: 250 mA @ 3.3V, 802.11g: 230mA @ 3.3V Listening: 190mA @ 3.3V
Weight	20g
Board Size	64.7 x 44.6 x 3.8mm
Operating Temperature	0°C ~ +55°C
Compliance Certifications	CE/FCC/Wi-Fi/NCC/Telec/Singapore

Packing List

- MINI-PCI-WLAN-CARD x1
- WIRELESS-ANTENNA x1 (Optional)
- WIRELESS-CABLE-150MM x1 (Optional)



Specifications


Chipset	VIA VT6656 Wireless LAN Controller
Bus	USB standard compliant
Frequency Band	2400-2483.5MHz (for US, Canada) 2400-2483.5MHz (for Europe) 2400-2497MHz (for Japan)
Operating Channel	IEEE 802.1b, Direct Sequence Spread Spectrum, IEEE 802.11g, Orthogonal Frequency Division Multiplexing 11 Channels (US, Canada) 13 Channels (Europe and Japan)
Driver Support	Windows: 98SE/Me/NT/2000/XP/2003 Ser., Linux (2.4.x/2.6.x), CE (4.2/5.0/6.0) Linux source code available on website
Power consumption	802.11b: 250 mA @ 3.3V, 802.11g: 230mA @ 3.3V Listening: 190mA @ 3.3V
Weight	10g
Board Size	25 x 60 x 5.9mm
Operating Temperature	0°C ~ +55°C
Compliance Certifications	CE/FCC/Wi-Fi/NCC/Telec/Singapore

Packing List

- USB-WLAN-MODULE x1
- WIRELESS-CABLE-150MM x1 (Optional)
- WIRELESS-ANTENNA x1 (Optional)
- CABLE-WLAN-30M (2.0) x1 (Optional)
- CABLE-WLAN-30M (2.54) x1 (Optional)
- CABLE-USB-WLAN-30CM x1 (Optional)

ICOP-0070

Power Supply AC/DC



Specifications


Power	Input voltage range: 90 ~ 264VAC Output voltage: +5VDC @ 2A -5VDC @ 0.2A +12VDC @ 1A -12VDC @ 0.3A Inrush frequency: 47 ~ 63Hz Inrush current cold: 20A @ 110VAC, 40A @ 220VAC Hold-up time: 500ms Rise time: 500ms Overload protection: power limit Short protection: auto-recovery MOSFET design Built-in line filter Meets FCC, CE, TUV, UL478 and CS Fast type FUSE 2A/250V
Bus	PC/104 standard compliant
Connectors	3-pin AC input x1 6-pin DC output x1
Weight	120g
Board Size	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	0°C ~ +60°C

Packing List

- ICOP-0070 x1
- Screw Kit x1

ICOP-0071

Power Supply DC/DC Module



Specifications


Power	Input voltage range: +8V ~ +48VDC Output voltage: 5V @ 2A Overload protection Overheat protection Converted frequency: 52KHz Converted effect: Over 80% Suitable for auto/truck system
Bus	PC/104 standard compliant
Connectors	2-pin AC input x1
Weight	85g
Board Size	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	-20°C ~ +60°C

Packing List

- ICOP-0071 x1
- Screw Kit x1

ICOP-0072

Power Supply DC/DC with DIO Module



Specifications

Power	Input voltage range: +8V ~ +48VDC Output voltage: 5V @ 400mA Switch frequency: 52KHz Efficiency: 80% Overload protection: shutdown when reaching thermal or current limit
Bus	PC/104 standard compliant
Digital I/O	24-bit digital I/O lines (1 group) Group emulates 8225PPI mode 0 Buffered circuits for higher driving capacity more than 8255 Output status read back Pin-compatible with OPTO-22 I/O module racks Transfer rate: 300 KB/sec. (typical) Digital output: Logic level 0: 0.5V max. @ 24mA sink Logic level 1: 2.0V min. @ 15mA source Digital input: Logic level 0: 0.8V max. Logic level 1: 2.0V min.
Connectors	2.54mm 50-pin box header for I/O port
Weight	110g
Board Size	90 X 96mm (3.54 x 3.77 inches)
Operating Temperature	-20°C ~ +60°C

Packing List

- ICOP-0072 x1
- Screw Kit x1

1

μProcessor Module

2

Mity/Tiny CPU Module

3

PC/104 CPU Module

4

Half-Size CPU Module

5

3.5" CPU Module

6

Peripheral Module

7


Display Product Series

8

Accessories & Technical Information

ICOP-0101

48-bit Digital I/O Module



Specifications

48-bit digital I/O lines (2 groups)
Group emulates 8225 PPI mode 0
Buffered circuits for higher driving capacity than 8255
Bit 0 of port C can generate an interrupt to IRQ 2, 3, 4, 5, 6 or 7
Interrupt trigger on rising/falling edge
Output status read back
Pin compatible with OPT
0-22 I/O module racks
Transfer rate: 300 KB/sec. (typical)
Digital output: Logic level 0: 0.5V max. @ 24mA
Logic level 1: 2.0V min. @ 15mA
Digital input: Logic level 0: 0.8V max.
Logic level 1: 2.0V min.


Bus	PC/104 standard compliant
Connectors	2.54mm 50-pin box header for I/O port x2
Power Requirement	Single Voltage +5V @ 600mA
Weight	95g
Board Size	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	-20°C ~ +60°C

Packing List

- ICOP-0101 x1
- Screw Kit x1

ICOP-0102

24-bit Digital I/O Module



Specifications

24-bit digital I/O lines (1 group)
Group emulates 8225 PPI mode 0
Buffered circuits for higher driving capacity than 8255
Interrupt trigger on rising/falling edge
Output status read back
Pin compatible with OPT 0-22 I/O module racks
Transfer rate: 300 KB/sec. (typical)
Digital output: Logic level 0: 0.5V max. @ 24mA sink
Logic level 1: 2.0V min. @ 15mA
Digital input: Logic level 0: 0.8V max.
Logic level 1: 2.0V min.


Bus	PC/104 standard compliant
Connectors	2.54mm 50-pin box header for I/O port x1
Power Requirement	Single Voltage +5V @ 600mA
Weight	76g
Board Size	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	0°C ~ +55°C

Packing List

- ICOP-0102 x1
- Screw Kit x1

ICOP-1800

Multi RS-232C Module

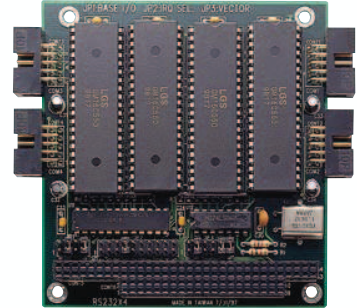

Specifications

Chipset	UART 16C550 x4 RS-232 asynchronous port x4 Supports: TxD, Rx, RTS, CTS, DTR, DSR, DCD, GND Interrupt select: 2, 3, 4, 5, 7 RS-232 modem control signals I/O address: 100h to 300h Baud rate: up to 115.2Kbps
Bus	PC/104 standard compliant
Connectors	2.54mm 10-pin box header for RS-232 x4
Power Requirement	Single +5V @ 200mA
Weight	100g
Board Size	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	-20°C ~ +55°C

Packing List

- ICOP-1800 x1
- Cable RS-232 x4
- Screw Kit x1

ICOP-2811

PC/104 VGA/ LCD Module



Specifications


Chipset	TOPRO TP6508IQ Chipset 16-bit ISA bus Panel Data bus: 24-bit Display Support: VGA and Flat Panel Display, Mono/ TFT/DSTN LCD
BIOS	VGA BIOS
Video Memory	Onboard 512KB, Resolution up to 640 x 480 @ 256 colors (Optional Onboard 1 MB, 1024 x 768 @ 256 colors)
Bus	PC/104 standard compliant
Connectors	2.54mm 10-pin box header for VGA x1 2.0mm 44-pin box header for LCD x1 External 15-pin D-Sub female connector for VGA x1
Power Requirement	Single Voltage +5V @ 500mA
Weight	250g
Board Size	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	-20°C ~ +60°C

Packing List

- ICOP-2811 x1
- Screw Kit x1

ICOP-4087

PC/104 Solid State Disk Module



Specifications


Features	Emulated to 2 Floppy disk drivers (A: / B:) 530 mAh Lithium Battery for SRAM data retention
Flash Disk	Support SRAM/NVSRAM up to 4 Sockets Maximum capacity 512KB SRAM/NVSRAM x 4 = 2MB Compatible with BIOS level, without programmodification and driver requirement
Bus	PC/104 8 Bit standard compliant
Connectors	32 Pin DIP socket for SRAM / NVSRAM x4
Power Requirement	Single Voltage +5V @ 120mA
Weight	80g
Board Size	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	0°C ~ +60°C

Packing List

- ICOP-4087 x1
- Screw Kit x1

PC104-1918-USB

USB 2.0 PC/104 Module



Specifications

Bus	PC/104 standard compliant
Chipset	GL850G USB 2.0 HUB Controller
USB	8 x USB 2.0 Compliant Ports Compliant to USB specification Revision 2.0 Backward compatible to USB specification Revision 1.1 Upstream port supports both high-speed (HS) and full-speed (FS) traffic Downstream ports support HS, FS, and low-speed (LS) traffic Uses standard EHCI and OHCI drivers
Connectors	External USB connector for x 9 External USB B type connector for x 1
Power Requirement	Single Voltage +5V (Board Only)
Weight	80g
Board Size	90 X 96mm (3.54 x 3.77 inches)
Operating Temperature	0°C ~ +70°C

Packing List

- PC104-1918-USB x1
- CABLE-PC104-1918-USB x1

1

µProcessor Module

2

Mity/Tiny CPU Module

3

PC/104 CPU Module

4

Half-Size CPU Module

5

3.5" CPU Module

6

Peripheral Module

7


Display Product Series

8

Accessories & Technical Information

SD-1917

IDE to microSD Module



Specifications


Features	44 pins IDE to microSD Adapter Support SDHC cards
Connectors	2.0mm 44-pin connector for IDE x1 microSD connector x2
Weight	10g
Dimension	48 x 32.6 mm (W x H)
Operating Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)
Embedded CPU board support	Vortex86DX series

Packing List

- SD-1917 x1

IDE-SATA26-V-44 ICOP-0096

2.5" IDE to SATA Module




Specifications

Features	Converts standard IDE to SATA interface Complies with ATA/ATAPI-6 specification rev 1.0. Support 16-bit Multiword DMA mode and Ultra DMA mode interface. Complies with Serial ATA specification rev. 2.6.
Chipset	GL831 SATA to PATA Controller
Weight	10g
Board Size	48 X 33mm (1.89 x 1.3 inches)
Operating Temperature	0°C ~ +70°C

Packing List

- IDE-SATA26-V-44 x1
- CABLE-SATA-30CM x1

TFT to LVDS 18bits Converter

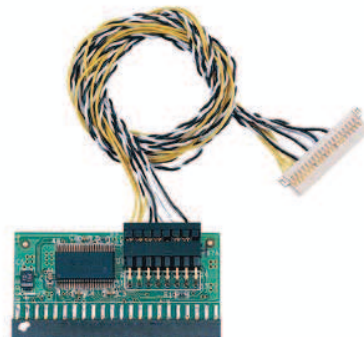

Specifications

The ICOP-0096 is a TFT to LVDS Converter Kit that connects Vortex86SX and Vortex86DX SBC to the AUO LVDS Flat Panels Display. The corresponding LCD BIOS is also available for Panels ranging from 6.5", 8.4", 10.4, 12.1" and 15"


Chipset	T.I. SN75LVDS84 FLATLINK TRANSMITTERS
Connectors	2.0mm Ø, 44-pin box header for TFT flat panel x1 2.0mm Ø, 16-pin pin header for connection to AUO LVDS Panel display x1
Weight	10g
Board Size	44mm x 21mm (1.73 x 0.82 inches)
Operating Temperature	0°C ~ +70°C

Packing List

- ICOP-0096 x1

PC104-1911-CF

PC/104 IDE to Compact Flash module



Specifications


Features	ATA to standard IDE interface
Bus	PC/104 standard compliant
Connectors	2.0mm 44-pin box header for IDE x1 2.54mm 4-pin header for +12V, -12V, -5V x1 Type I/II Compact Flash slot x1
Weight	80g
Board Size	90 x 96mm (3.54 x 3.77 inches)
Operation Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)

Packing List

- PC104-1911-CF x1
- Screw Kit x1

PC104-1911-MINIPCI

PCI-104 MINIPCI Module



Specifications

Features	PCI-104 bus to Mini PCI bus
Bus	PCI-104 standard compliant
Connectors	0.8mm 124-pin Mini-PCI card connector x1
Weight	55g
Board Size	90 x 96mm (3.54 x 3.77 inches)
Operation Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)

Packing List

- PC104-1911-MINIPCI x1
- Screw Kit x1

CF-1915

IDE to Compact Flash Module



Specifications

Converts IDE to Compact Flash	
Status Indicators	Power LED IDE Active LED
Connectors	2.0mm 44-pin box header x1 2.0mm 44-pin socket x1 2.54mm 40-pin header x1 2.54mm 4-pin Molex connector for power input x1 Type I/II Compact Flash slot x1
Weight	28g
Board Size	66 x 68mm (2.6 x 2.68 inches)

Packing List

- CF-1915 x1
- Cable
HDD 44P(2.Q) x1

1

µProcessor Module

2

Mity/Tiny CPU Module

3

PC/104 CPU Module

4

Half-Size CPU Module

5

3.5" CPU Module

6

Peripheral Module

7


Display Product Series

8

Accessories & Technical Information

CF-1916

IDE to Compact Flash Module



Specifications

Features	ATA to standard IDE interface
Status	Power LED
Indicators	IDE Active LED
Connectors	2.0mm 44-pin box header for IDE x1 Type I/II Compact Flash slot x1
Weight	55g
Board Size	90 x 96mm (3.54 x 3.77 inches)
Operation Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)

Packing List

- CF-1916 x1
- Screw Kit x1

ICOP-0091

PC/104 Interface to ISA Bus



Specifications

Converts 104-pin PC/104 interface to 98-pin ISA Bus	
Status Indicators	Power LED for +5V, -5V, +12V, -12V x4
Connectors	2.54mm 104-pin socket for PC/104 interface x1 98-pin Gold finger for ISA interface x1
Weight	34g
Board Size	134 x 33mm (5.27 x 1.3inches)

Packing List

- ICOP-0091 x1

ICOP-0093

x-ISA Interface to ISA Bus



Specifications

Converts 64-pin x-ISA interface to 98-pin ISA Bus	
Status Indicators	Power LED for +5V, -5V, +12V, -12V x4
Connectors	2.0mm 64-pin socket for Mity-Mite x-ISA interface x1 2.54mm 64-pin socket for Tiny x-ISA interface x1 98-pin Gold finger for ISA interface x1
Weight	34g
Board Size	134 x 33mm (5.27 x 1.3inches)

Packing List

- ICOP-0093 x1

ICOP-0097

x-PCI Interface to PCI Bus



Specifications

Converts 64-pin x-PCI interface to PCI Bus


Connectors	124-pin slot for PCI x1 2.0mm 64-pin header for x-PCI x1
Weight	24g
Board Size	88 x 25mm (3.46 x 0.98inches)

Packing List

- ICOP-0097 x1

ICOP-0094

IDE Exchanger Kit



Specifications

Converts 2.0mm 44-pin header to 2.54mm 40-pin header


Cable	2.54mm 40-pin to 2.54mm 40-pin IDE cable x1 2.0mm 44-pin to 2.0mm 44-pin IDE cable x1
Connectors	2.0mm 44-pin box header for IDE x2 2.54mm 40-pin box header for IDE x2 4-pin MOLEX connector for power input x1
Weight	80g
Board Size	70 x 50mm (2.75 x 1.96 inches)

Packing List

- ICOP-0094 x1
- Cable
- HDD x1
- HDD 44Px3 (52cm) x1

ICOP-0076

LAN Adapter Kit



Specifications

Features	Adapt internal LAN (8 Pin header) for external connection
Connectors	2.0mm 8-pin box header External RJ-45 connector for Ethernet
Weight	10g
Board Size	30 x 30mm (1.18 x 1.18inches)
Operating Temperature	0°C ~ +60°C
Embedded CPU boards support	Vortex86SX/Vortex86DX Series

Packing List

- ICOP-0076 x1
- NET4x2 (2.0) -0076 x1

1

µProcessor Module

2

Mity/Tiny CPU Module

3

PC/104 CPU Module

4

Half-Size CPU Module

5

3.5" CPU Module

6

Peripheral Module

7


Display Product Series

8

Accessories & Technical Information

ICOP-8003

3 Slots ISA Backplane

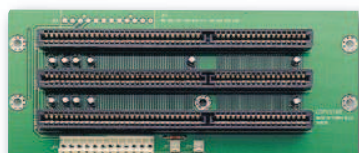

Specifications

Power Indicators	One each for +5V/-5V/+12V/-12V, 12-pin AT Molex connector for connection to AT Power source
Weight	135g
Board Size	180 x 75mm (7.08 x 2.95 inches)

Packing List

- ICOP-8003 x1

ICOP-8005

5 Slots ISA Backplane



Specifications


Power Indicators	One each for +5V/-5V/+12V/-12V, 6-pin AT Molex connector for connection to AT Power source
Weight	180g
Board Size	180 x 105mm (7.08 x 4.13 inches)

Packing List

- ICOP-8005 x1

ICOP-8008

8 Slots ISA Backplane

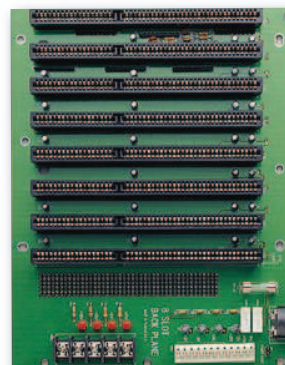

Specifications

Power Indicators	One each for +5V/-5V/+12V/-12V, 12-pin AT Molex connector for connection to AT Power source
Terminal Block	5-pole Industrial Terminal Block for connection to power source - +5V/-5V/+12V/-12V/GND
Connectors	2.54mm box header for Keyboard x2 External 5-pin Keyboard connector x1
Safety Fuse	2A Fuse for V-input 220VAC/110VAC x1
Status Indicators	Power LED for +5V/-5V/+12V/-12V x4
Weight	350g
Board Size	220 x 73mm (8.66 x 2.87 inches)

Packing List

- ICOP-8008 x1

POWER SUPPLY

AC/DC Power Adapter

PS-047A-3Y



Power-15W



Power-15W-3pin



Electrical Specifications:

Maximum Power	47W
AC Input	+100 ~ 240VAC @ 1A, 50/60Hz
DC Output	+5VDC @ 7A, +12VDC @ 1.5A, -12VDC @ 0.3A Triple outputs
Protection	Over voltage protection, AC recycle; Over circuit protection, Auto recover
Operating Temperature	0°C to +40°C
Storage Temperature	-10°C to +70°C

Electrical Specifications:

Maximum Power	15W
AC Input	+100 ~ 240VAC @ 1A, 50/60Hz AC100-240V ~ 50/60Hz 0.45Amax
DC Output	+5VDC @ 3A
Protection	Over voltage protection, AC recycle; Over circuit protection, Auto recover
Operating Temperature	0°C to +40°C
Storage Temperature	-10°C to +70°C

Electrical Specifications:

Maximum Power	15W
AC Input	+100 ~ 240VAC @ 1A, 50/60Hz AC100-240V ~ 50/60Hz 0.45Amax
DC Output	+5VDC @ 3A
Protection	Over voltage protection, AC recycle; Over circuit protection, Auto recover
Operating Temperature	0°C to +40°C
Storage Temperature	-10°C to +70°C

1

µProcessor
Module

2

Mity/Tiny CPU
Module

3

PC/104 CPU
Module

4

Half-Size CPU
Module

5

3.5" CPU
Module

6

Peripheral
Module

7

Display Product
Series


8

Accessories &
Technical Information

Embedded Barebone system

EB-206: Chassis for VDX-6326

Front Side View



Rear Side View



Ordering Information:

- **EB-206** Chassis for VDX-6326
- **VDX-6326** Vortex86DX 3.5" CPU Module with 256MB DDR2

EB-207: Chassis for VDX-6327

Front Side View



Rear Side View



Ordering Information

- **EB-207** Chassis for VDX-6327
- **VDX-6327** Vortex86DX 3.5" CPU Module with 256MB DDR2

EB-208: Chassis for VDX-6328

Front Side View



Rear Side View



Ordering Information

- **EB-208** Chassis for VDX-6328
- **VDX-6328** Vortex86DX 3.5" CPU Module with 256MB DDR2