

# ACE-716C *150 W 24V DC input AT Power Supply*



Input Type	19 ~ 30 VDC				
Output Voltage	+5 V	+12 V	-5 V	-12 V	+24 V
	18 A (2 A min)	4 A	0.5 A	1 A	
Efficiency	70 %				
Temperature	Operating : -20 °C~ 70 °C (50 °C~ 70 °C derating curve) Storage : -20 °C~ 85 °C				
MTBF(hrs)	210,000				
Output Connector	Optional Cable				
Dimensions	198 x 97 x 40.5 mm				


### Output terminal block connectors

Pin 1, 2	Pin 3, 4	Pin 5	Pin 6	Pin7	Pin8
5 V	GND	-5 V	-12 V	GND	+12 V

## Ordering Information

- **ACE-716C-RS**  
150 W 24 V DC input AT Power Supply

## Dimensions

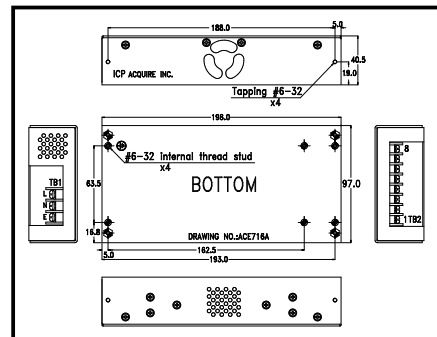

## Optional 1 Embedded Solution



PN: **CB-716EB-RS**

30 cm DC cable to CPU card with 4-pin 12 V CPU, HDD and SATA connectors

## Optional 2 ATX Backplane Solution



PN: **CB-716BP-RS**

30 cm DC cable to backplane with 20-pin ATX, HDD, SATA and HDD connectors

## Optional 3 AT P8P9 Backplane Solution



PN: **CB-716P8P9-RS**

30 cm DC cable AT power to P8P9 with HDD and SATA connectors