


ACE-865V/870C/T *DC Input Open Frame*



ACE-865V

ACE-870C/T

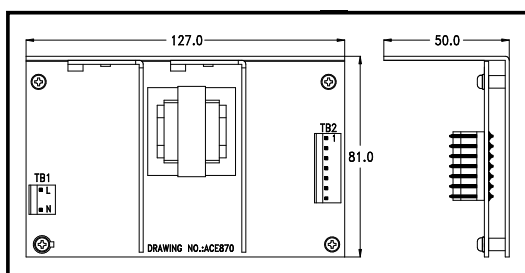

Ordering Information

- **ACE-865V-RS**
60W 12V DC Input Open Frame AT Power Supply
- **ACE-870C-RS**
70W 24V DC Input Open Frame AT Power Supply
- **ACE-870T-RS**
70W 48V DC Input Open Frame AT Power Supply

Input Type	8 ~ 16 VDC (ACE-865V), 18 ~ 36 VDC (ACE-870C), 36 ~ 72 VDC (ACE-870T)				
Output Voltage	+5 V	+12 V	-5 V	-12 V	+24 V
ACE-865V	6 A	2 A	0.3 A	0.5 A	
ACE-870C/T	7 A	2.5 A	0.3 A	0.5 A	
Efficiency	70 %				
Temperature	0 °C~ 50°C (Operating), -20 °C~ 85 °C(Storage)				
MTBF(hrs)	246,000 (ACE-865V), 276,000 (ACE-870C/T)				
Output Connector	Optional Cable				
Dimensions	127 x 81 x 50 (mm)				

Optional 2 Embedded Solution



PN: CB-870EB-RS
30 cm DC cable to CPU card, with 20-pin ATX, HDD and SATA connectors

Optional 3 ATX Backplane Solution



PN: CB-870BP-RS
30 cm DC cable to backplane, with 20-pin ATX, HDD and SATA connectors

Optional 4 AT P8P9 Backplane Solution



PN: CB-870P8P9-RS
30 cm DC cable to backplane, with 20-pin ATX, HDD and SATA connectors