

ACE-870A/AP *70 W AC-DC Open Frame AT Power Supply*

70W




PFC



Input Type	85 ~ 264VAC Full Range				
Output Voltage	+5V	+12V	-5V	-12V	+24V
	7A	2.5A	0.3A	0.3A	
Efficiency	70%				
Temperature	0 ~ 50°C (Operating), -20 ~ 85°C(Storage)				
MTBF(hrs)	296,000(ACE-870A) , 238,000(ACE-870AP)				
Output Connector	Optional Cable				
Dimensions	127 x 81 x 50 mm				

Ordering Information

- **ACE-870A-RS**
70W AC-DC Open Frame AT Power Supply
- **ACE-870AP-RS**
70W AC-DC Open Frame AT Power Supply, with PFC

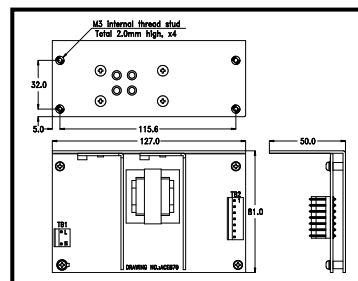

Optional 1 AC Input Solution



PN: CB-870EC-RS
20 cm AC input cable with fuse

Optional 2 Embedded Solution



PN: CB-870EB-RS
30 cm DC cable to CPU card, with 20-pin ATX, HDD and SATA connectors

Optional 3 ATX Backplane Solution



PN: CB-870BP-RS
30 cm DC cable to backplane, with 20-pin ATX, HDD and SATA connectors

Optional 4 AT P8P9 Backplane Solution



PN: CB-870P8P9-RS
30 cm DC cable AT power to P8P9, HDD and SATA connectors