


ACE-890A/AP *86 W AC-DC Open Frame AT Power Supply*

86W



PFC

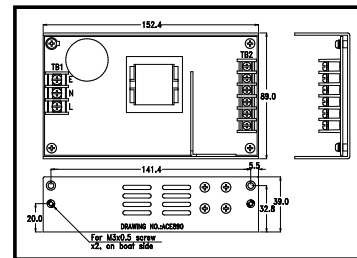

Input Type	85 ~ 264 VAC Full Range (ACE-890A) 90 ~ 264 VAC Full Range (ACE-890AP-R20)				
Output Voltage	+5 V	+12 V	-5 V	-12 V	+24 V
ACE-890A	10 A	2.5 A		0.5 A	
ACE-890AP	10 A (3A min)	2.5 A (0.25A min)		0.5 A	
Efficiency	70 %				
Temperature	ACE-890A : 0 °C~ 50 °C (Operating), -20 ~ 85 °C(Storage) ACE-890AP : 0 °C~ 50 °C (Operating), -30 °C~ 70 °C(Storage)				
MTBF(hrs)	268,000(ACE-890A) , 300,000(ACE-890AP)				
Output Connector	Optional Cable				
Dimensions	152.4 x 89 x 39 mm				

Ordering Information

- **ACE-890A-RS**
86W AC-DC Open Frame AT Power Supply
- **ACE-890AP-R20-RS**
86W AC-DC Open Frame AT Power Supply, with PFC

Optional 1 AC Input Solution



PN: CB-643EC-RS
20 cm AC input cable with fuse

Optional 2 Embedded Solution



PN: CB-643EB-RS
30 cm DC cable to CPU card, with 20-pin ATX, HDD and SATA connectors

Optional 3 ATX Backplane Solution



PN: CB-890BP-RS
30 cm DC cable to backplane, with 20-pin ATX, HDD and SATA connectors

Optional 4 AT P8P9 Backplane Solution



PN: CB-890P8P9-RS
30 cm DC cable AT power to P8P9, HDD and SATA connectors