


HUMIN 19 QC

19" Aluminium Panel PC w/RFiD Legic Reader and PKI

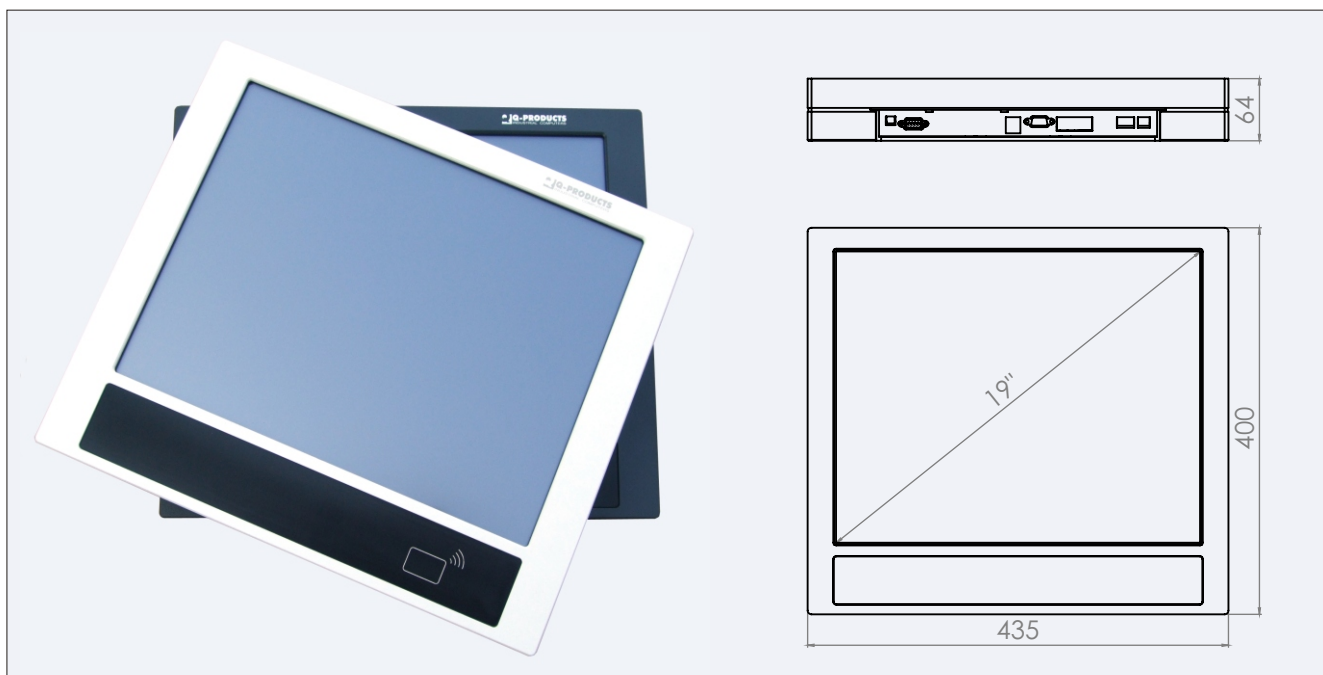

Universal fanless Panel PC with integrated touch screen and RFiD Legic Advant reader. CNC milled robust alluminium body for harsh enviroment. Wide variety of connectors: standard, M12 or MIL IP65 protected types.

All these features combine to provide a powerful slim panel PC solution with excellent performance. Afordable and reliable quality at panel PCs are used in Human Machine Interface (HMI), SCADA, process control, factory automation, building control and home automation.

Technical specification:

_LCD size:	19" 1280x1024 5:4 TFT LED LCD, 300cd/m2, 16.2M color, 2000:1
_Touchscreen:	Resistive type
_CPU, Chipset:	Intel® Bay Trail M Celeron N2930 1.83GHz (Burst 2.16GHz, quad-core)
_RAM:	4GB RAM (8GB max.)
_HDD/CF:	SATA SSD 120GB min.
_RFiD:	13.56MHz RFiD Legic 4200 reader RF Standard, ISO14443A/B, ISO15693 compatible, NFC compatible
_Interfaces:	Display Port, Gigabit LAN, 1xRS232 non-isolated, 1xRS232 isolated 1xRS485 isolated, 2xUSB2.0, 2xUSB3.0
_PKI reader:	PKI smart card reader
_Digital I/O:	4-ch isolated Digital input 0-24VDC, 4-ch SSR relay output 60V/0.6A
_Power input:	10-30V DC, max. 60W (25W PC only)
_Power output:	for external devices: 5V DC/500mA, 19V DC/3A (input voltage)
_Dimensions, weight:	435.0 x400.0 x 64.0 mm (WxHxD), 11kg
_Mounting:	VESA mount 75 and 100 on rear side, panel mount ver.
_Operating temp.:	-20°C to +60°C
_Storage temp.:	-40°C to +80°C
_Option:	IP64 version with watterproof conn., EX ZONE 22

Authorised reseller:



Producer:



Q-PRODUCTS

Rybničná 38/K
83106 Bratislava
Slovakia, EU

tel.: +421 (0) 2 4464 6474
fax: +421 (0) 2 4464 6476
info@qproducts.sk