


PAC-106G


6-slot Full-size Compact Chassis

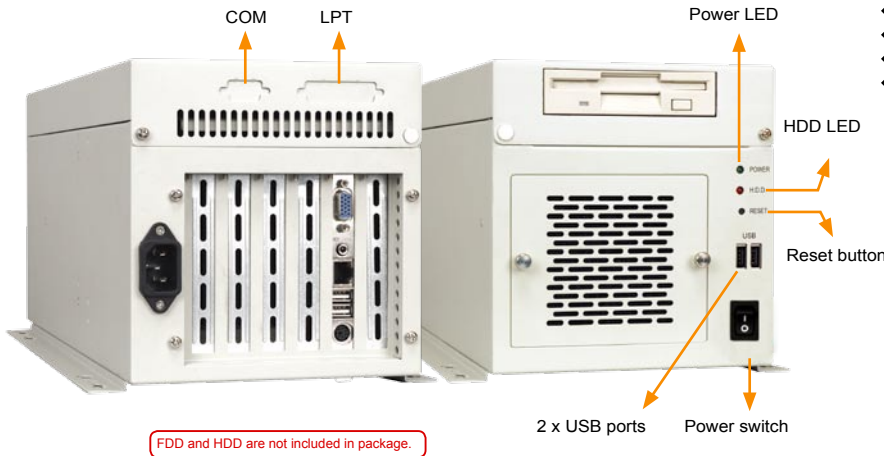

FDD and HDD are not included in package.

Features


- ◆ RoHS compliant design
- ◆ 2 x front-accessible USB ports
- ◆ 1 x 3.5" front accessible + 1 x 3.5" HDD drive capacity
- ◆ 1 x 8 cm cooling fans

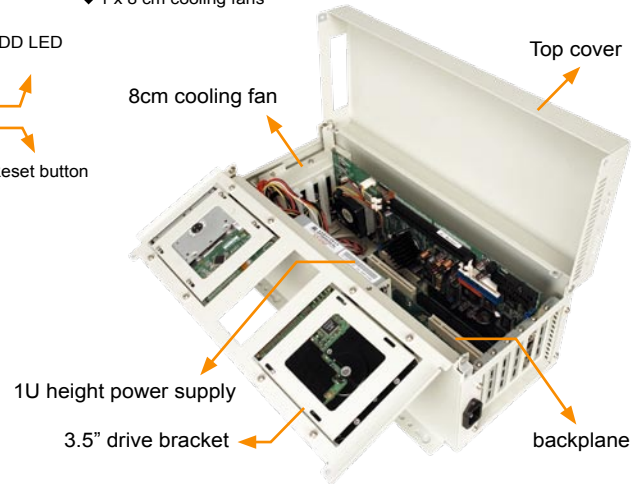

Specifications

| | |
|-------------------------|---|
| ◆ Construction | Heavy duty metal |
| ◆ SBC Form Factor | Full-size, slot CPU card |
| ◆ Drive Bays | 1 x front-accessible 3.5" 1 x 3.5" HDD |
| ◆ Cooling Fans | 1 x 8 cm |
| ◆ I/O Ports | 2 x USB |
| ◆ I/O openings | 1 x COM, 1 x LPT |
| ◆ Expansion Slots | 6 slots |
| ◆ Indicators | Power, HDD |
| ◆ Buttons | Power switch, reset |
| ◆ Operating Temperature | 0~50°C |
| ◆ Operation Humidity | 10% ~ 90% |
| ◆ Color | W: White |
| ◆ Weight (Net/Gross) | 5.2kg / 7.8kg |
| ◆ Dimensions (DxWxH) | 400mm x 166mm x 175.5mm |

Dimensions

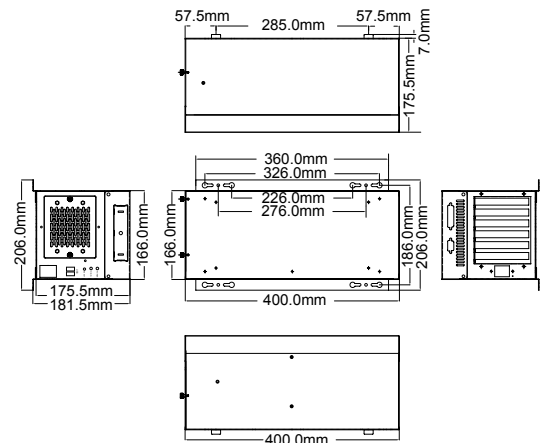

Backplane Options

| Model No. | SBC Type | PCI | ISA | PCIe | | | PSU Connector |
|---------------|-----------|-----|-----|------|----|-----|---------------|
| | | | | x1 | x4 | x16 | |
| BP-6S-RS-R30 | ISA | 0 | 6 | 0 | 0 | 0 | AT |
| IP-6S-RS-R30 | PCISA | 3 | 2 | 0 | 0 | 0 | AT |
| IP-6SA-RS-R30 | PCISA | 3 | 2 | 0 | 0 | 0 | ATX |
| PCI-6S-RS-R30 | PICMG 1.0 | 4 | 2 | 0 | 0 | 0 | AT/ATX |
| PE-5S | PICMG 1.3 | 2 | 0 | 1 | 0 | 1 | ATX |
| PE-6S2 | PICMG 1.3 | 3 | 0 | 1 | 0 | 1 | ATX |
| PE-6S3 | PICMG 1.3 | 1 | 0 | 3 | 0 | 1 | ATX |

Power Supply Options

| Type | Model No. | Watt |
|------|---------------|------|
| AT | ACE-916AP-RS | 150W |
| | ACE-816AP-RS | 150W |
| ATX | ACE-4518AP-RS | 180W |

PAC-106G can support single 1U height PSU, for more models of IEI PSU, please visit www.ieiworld.com

Ordering Information

| Part No. | Description |
|------------------------|---|
| PAC-106GW / ACE-4518AP | 6-slot full-size chassis, white, with ACE-4518AP-RS, RoHS |