


# PAC-700G

## 7-slot Half-size Compact Chassis



CD-ROM, FDD and HDD are not included in package

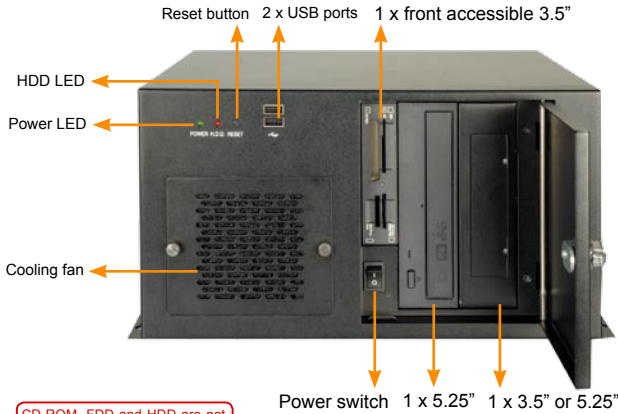

### Features


- ◆ RoHS compliant design
- ◆ 2 x USB ports on front panel
- ◆ 1 x 8 cm cooling fan with fan filter
- ◆ Easy accessible design for fan replacement

### Easy hot-replaceable fan



- Step 1: Loosen the thumb screws  
 Step 2: Pull the fan out gently  
 Step 3: Unplug the power connector

### Dimensions

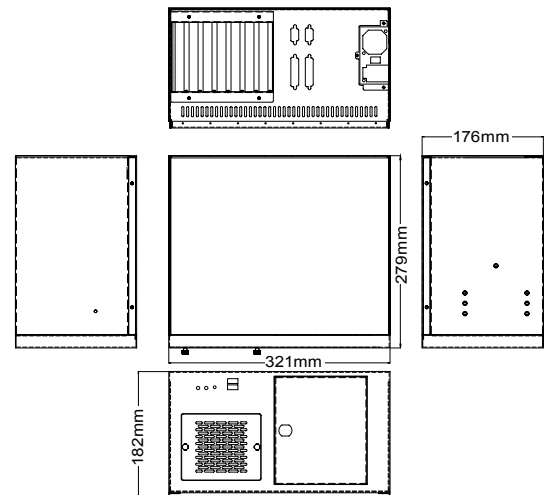

### Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
BP-7S-RS-R30	ISA	0	7	0	0	0	AT
IP-7S-RS-R30	PCISA	4	2	0	0	0	AT
IP-7SA-RS-R30	PCISA	4	2	0	0	0	ATX
HPE-7S1	PCI/PICoE	4	0	2	0	0	ATX

### Power Supply Options

Type	Model No.	Watt
AT	ACE-916AP-RS	150W
	ACE-816AP-RS	150W
ATX	ACE-4518AP-RS	180W

PAC-700G can support single 1U height PSU. For more models of IEI PSU, please visit [www.ieiworld.com](http://www.ieiworld.com)

### Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Half-size, slot CPU card
◆ Drive Combinations	2 x 5.25" + 1 x front accessible 3.5" or 1 x 5.25" + 2 x front accessible 3.5" or 1 x 5.25" + 1 x front accessible 3.5" + 1 x 3.5" HDD
◆ Cooling Fans	1 x 8cm
◆ I/O ports	2 x USB on front panel
◆ I/O openings	2 x LPT, 2 x COM
◆ Expansion Slots	7 slots
◆ Indicators	Power, HDD
◆ Buttons	power switch, reset
◆ Operating Temperature	0~50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	B: Black
◆ Weight (Net/ Gross)	6.2kg / 9kg
◆ Dimension (DxWxH)	279mm x 321mm x 176mm

### Ordering Information

Part No.	Description
PAC-700GB/BP-7S/ACE-916AP	7-slot half-size chassis, with BP-7S-RS-R30 and ACE-916AP-RS
PAC-700GB/IP-7S/ACE-916AP	7-slot half-size chassis, with IP-7S-RS-R30 and ACE-916AP-RS
PAC-700GB/IP-7SA/ACE-816AP	7-slot half-size chassis, with IP-7SA-RS-R30 and ACE-816AP-RS