

PM-1004 *4-port non-isolated RS-232/422/485 serial communications PC/104 module*



P/N: 32200-026800-RS
Shipped with 4-port RS-422/485 connection cable


Features

1. PC/104 form factor
2. RoHS compliant
3. 16C554 UART controller
4. Four jumper selectable RS-232 or RS-422/485 serial communication ports
5. Supports shared IRQ or independent IRQ mode
6. Jumper selectable interrupt level
7. MAX. baud rate: 921.6kb/s
8. Windows® NT, Windows® 2000, Windows® XP, Windows® CE and Linux driver support

Specifications

Bus Interface	PC/104
Number of Ports	4-port
Interrupt Level	3, 4, 5, 7, 9, 10, 11, 12
Chipset	TI 16C554A
Baud Rate	921.6 Kbps (max.) at 14.745 MHz clock input
Serial ports	16C550-compatible UART
Connectors	One 4-port RS-232 connection cable (40-pin; 2.54 box header) One 4-port RS-232 connection cables (40-pin; 2.54 box header)
Power consumption	+5 V @ 0.6 A (max)
Temperature Operating	0°C ~ 60°C
Dimensions	95.89 mm x 90.17 mm
Driver support O.S.	Windows® NT, Windows® 2000, Windows® XP, Windows® CE and Linux

Dimensions (Unit : mm)

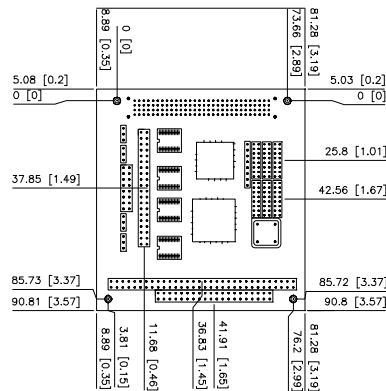

Packing List

- 1 x 4-port non-isolated RS-232/422/485 serial communications PC/104 module
- 1 x 4-port RS-422/485 connection cable (P/N: 32200-026800-RS)
- 1 x Utility CD
- 1 x RS-232 Cable (P/N: 32200-025400-RS)
- 1 x Mini jumper pack

Ordering Information

Part No.	Description
PM-1004-R20	4-port non-isolated RS-232/422/485 serial communications PC/104 module