


PR-1300G

3-slot Half-size Compact Chassis

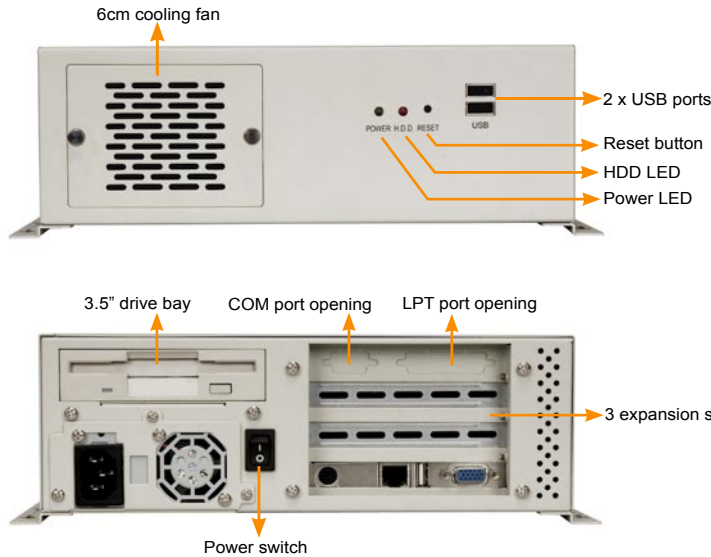


FDD and HDD are not included in package.

Features

- ◆ RoHS compliant design
- ◆ 1 x 3.5" drive capacity
- ◆ 2 x front-accessible USB ports
- ◆ 1 x 6cm cooling fan



Dimensions

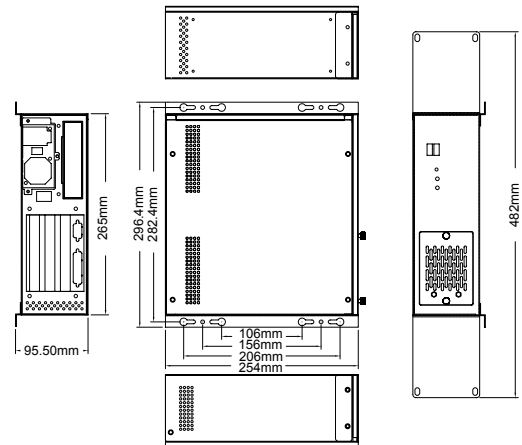

Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Half-size, slot SBC
◆ Drive Bays	1 x 3.5" (front accessible / HDD)
◆ Cooling Fans	1 x 6 cm
◆ I/O ports	2 x USB
◆ I/O openings	1 x LPT , 1 x COM
◆ Expansion Slots	3 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset
◆ Operating Temperature	0~50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	W: White
◆ Weight (Net/Gross)	2.6kg / 5.2kg
◆ Dimensions (DxWxH)	254mm x 265mm x 95.5mm

Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
BP-3S-RS-R30	ISA	0	2	0	0	0	AT
IP-3S-RS-R30	PCISA	2	0	0	0	0	AT
IP-3SA-RS-R30	PCISA	2	0	0	0	0	ATX
HPE-3S1	PCI/PICoE	2	0	0	0	0	ATX
HPE-3S2	PCI/PICoE	1	0	0	1	0	ATX

Power Supply Options

Type	Model No.	Watt
ATX	ACE-916AP-RS	150W
	ACE-816AP-RS	150W
	ACE-4518AP-RS	180W

PR-1300G can support single 1U height PSU. For more models of IEI PSU, please visit www.ieiworld.com

Ordering Information

Part No.	Description
PR-1300GW/ACE-916AP/BP-3S	3-slot half-size chassis, white, with ACE-916AP-RS and BP-3S-RS-R30, RoHS
PR-1300GW/ACE-916AP/IP-3S	3-slot half-size chassis, white, with ACE-916AP-RS and IP-3S-RS-R30, RoHS
PR-1300GW/ACE-816AP/IP-3SA	3-slot half-size chassis, white, with ACE-816AP-RS and IP-3SA-R30, RoHS