


RFiD

Durable UHF RFI D reader and writer

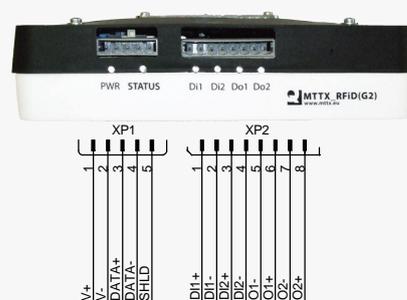

Universal RFI D reading and writing unit. Ideal for use in entrance systems, on assembly lines and in monitoring installations. The alternative to contact ID cards or bar-code solutions.

Indication of operation mode using six LED diodes. Exterior or interior versions available. Software and firmware designed according to customer needs. Colour of choice. Wide portfolio of holders and brackets (including custom-made solutions).

Frequency:	full range 860 to 960 MHz
Antenna:	bulit-in (default) or external
Operating Distance:	up to 10m, depending on tag
Interfaces:	RS-485 isolated, two digital I/O protocol: UHF Gen 2, EPCglobal Gen 2 (ISO 18000-6C)
Power requirements:	isolated input, 24V DC
Radio Power:	sw adjustable from 5 dBm to 30 dBm (1W)
Dimensions:	192.0 x 192.0 x 56.0 mm (WxHxD)
Operating temp.:	-20°C to +60°C
Storage temp.:	-40°C to +85°C

Authorised reseller:



Rybničná 36/E
83106 Bratislava
Slovakia, EU

tel.: +421 (0) 2 4464 6474
fax: +421 (0) 2 4464 6476
info@qproducts.sk