


HUMIN 15 V4

15" Aluminium Panel PC w/RFiD Legic Reader

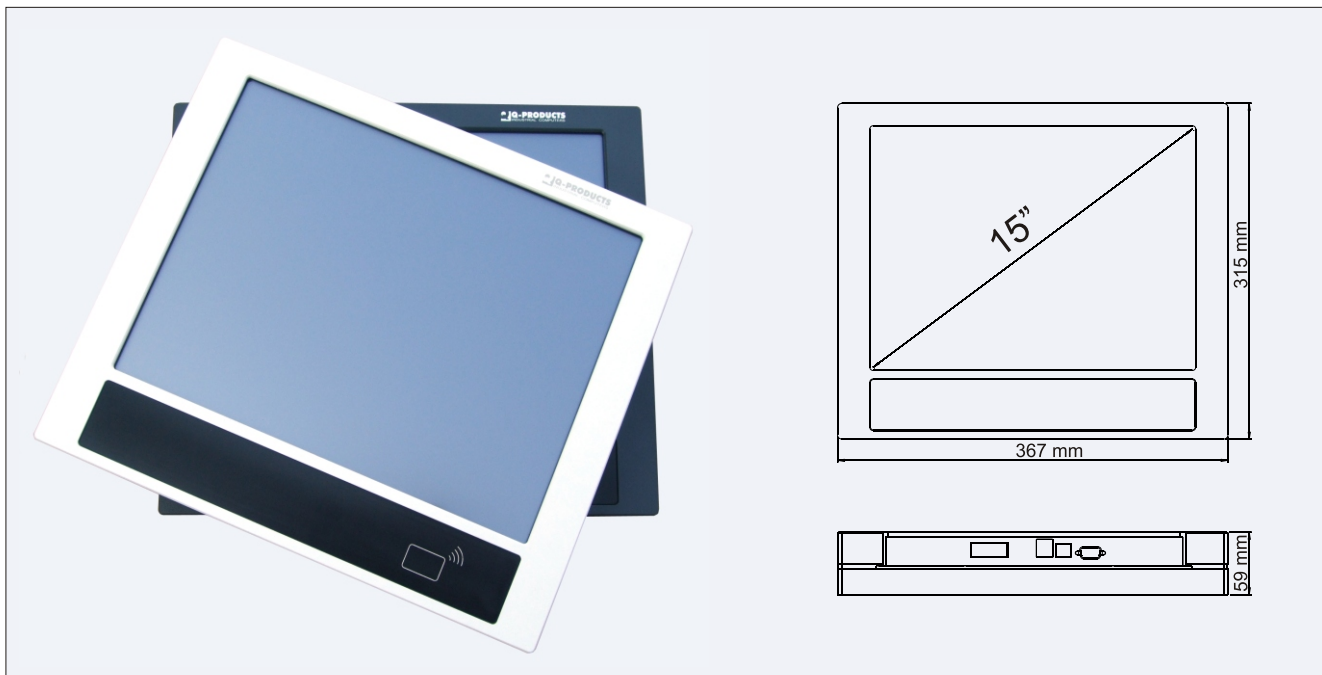

Universal fanless Panel PC with integrated touch screen and RFiD Legic Advant reader. CNC milled robust alluminium body for harsh enviroment. Wide variety of connectors: standard, M12 or MIL IP65 protected types.

All these features combine to provide a powerful slim panel PC solution with excellent performance. Afordable and reliable quality at panel PCs are used in Human Machine Interface (HMI), SCADA, process control, factory automation, building control and home automation.

Technical specification:

_LCD size:	15" 1024x768 TFT LED LCD, 400cd/m2, 16.2M color
_Touchscreen:	Resistive type w/ borosilicate glass, hardness 7H
_CPU, Chipset:	Intel® Atom Z530 1.6GHz, Intel® SCH US15W
_RAM:	1GB RAM (up to 2GB)
_HDD/CF:	CF slot, SATA I/II interface, ATA interface
_RFiD:	13.56MHz RFiD Legic SM-2560C/4200 reader RF Standard, ISO14443A/B, ISO15693 compatible
_Interfaces:	2xGigabit LAN, 1xRS232 non-isolated, 1xRS232 isolated, 1xRS485 isolated, 2xUSB2.0 (4xUSB2.0 internal)
_Power input:	10-30V DC
_Power output:	5V DC/500mA, 12V DC/3A
_Dimensions, weight:	367.0 x 315.0 x 59.0 mm (WxHxD), 10kg
_Mounting:	VESA 75 and VESA 100 on rear side
_Operating temp.:	-10°C to +60°C
_Storage temp.:	-20°C to +70°C

Authorised reseller:



Producer:



Rybničná 36/E
83106 Bratislava
Slovakia, EU

tel.: +421 (0) 2 4464 6474
fax: +421 (0) 2 4464 6476
info@qproducts.sk